

Nut and Screw Materials

In addition to the Kerk self-lubricating acetal nut material, we offer a variety of custom compounded **Kerkite® composite polymers**, formulated to provide optimum performance in their target conditions and applications.

- High performance materials
- Exceptional wear properties
- Cost and design advantages afforded through injection molding
- Mechanical, thermal and electrical properties; compatible with many chemicals and environmental conditions: temperature, chemical resistance, radiation resistance, etc.
- Compounded with lubricants, reinforcements and thermoplastic polymers

Kerk brand lead screws and linear rails start with premium grade 303 stainless steel. Kerk stainless steel lead screws are corrosion resistant, non-magnetic, and compatible with many demanding processes. The ideal starting point for a maintenance-free product, this premium quality stainless steel is being used in numerous applications including medical applications, clean rooms, food and human contact, salt spray, cryogenics and vacuum. We can also roll screws in many materials and produce nuts in alternative plastics. If the material can be molded, machined, ground, or rolled, we can likely process it.

Properties of Standard vs. Kerkite Materials			
	Standard Acetal	Kerkite KN30	Kerkite KP20
Material	Acetal w/Lubrication	Carbon Reinforced Nylon w/Lubrication	Carbon Reinforced PPS w/Lubrication
Color	Black	Blue	Black
Tensile Strength (PSI)	7,000-9,000	24,000-27,000	23,800
Flexural Modulus (PSI)	300,000-450,000	1,750,000	2,500,000
Deflection Temp (°F)	255	485	500
Thermal Exp. Coeff (IN/IN/F)	5.8 X 10 ⁻⁵	1.1 X 10 ⁻⁵	0.8 X 10 ⁻⁵
Constant Use Temp (°F)	150	300	400
Water Absorption (%)	.2	.9	.02
*Coefficient of Friction	.06-.12	.10-.15	.15-.20
PV Limit (@ 20 IN/SEC) PSI FPM	15,000	43,000	70,000*

Please note the above values are based on polymer industry standards and should be used as reference only. Materials need to be tested in individual applications to ensure that properties will be sufficient.

The actual value of coefficient of friction will depend on surface finish, environment and any additional lubrication.

**Please note manufacturers vary the PV listed values as well as the way PV is calculated. Please use these numbers for PV as a reference guide between materials. Higher PV materials are available.

***Please consult factory for proper use and alternative PPS materials with higher PV values.

Kerk Lead Screw TFE Coatings

We offer multiple options for lubrication. All Kerk lead screw nuts feature self-lubricating polymers. However, when maximum performance is required, Kerkote® and Black Ice® Teflon TFE coatings provide unmatched results in the most demanding applications. The purpose of TFE coating is to supply a more even distribution of lubricant than is normally found when using standard self-lubricating plastics on steel.

Kerkote TFE Coating

Lubrication to the nut/screw interface occurs by the nut picking up Kerkote® TFE particles from the soft coating as well as from the migration of the internal lubricant within the plastic nut. The lubricant, although solid, has some "spreading" ability as in fluid lubric

- Ideal for most environments (Black Ice recommended for harsh environments)
- Soft coating
- Dry lubricant
- Long term
- Maintenance-free
- Can be re-machined
- Optimized for softer plastics (acetals/nylons), with or without mechanical reinforcement
- Provides maximum level of self-lubrication
- Not intended to be used with additional lubricants
- Should not be used in environments where oils or other lubricant contamination is possible

Black Ice TFE Coating

Hard coating that remains on the screw. Rather than acting as a dry lubricant, it is an anti-friction coating whose surface properties displace the metal to which it is applied.

- Ideal for harsh environments or if reduced friction and a permanent coating is desired
- Hard coating
- Long term
- Maintenance free
- Low friction surface upon which the nut travels
- Exceptionally durable with virtually any type of polymer nut
- Not intended for use with metal or glass fiber reinforced nuts, although can withstand abrasion from contamination, rigid polymer systems, fluid impingement and wash down applications
- Not intended to be used with additional lubricants

Greases

Teflon TFE coatings are intended to be used without additional lubricants. However, there are certain applications where external lubrication may be desired. These include the use of nut materials such as glass reinforced plastic or metal. We offer a selection of greases developed specifically for these applications.

Lead Screw and Nut Assemblies

Kerk Lead Screw Assemblies are modified Acme thread forms optimized for performance and available in a broad range of lead screw diameters, leads and nut styles, custom designed for your application. Kerk Lead Screws are self-adjusting, maintenance-free and require no lubrication. Providing maximum accuracy, high reliability, smooth, quiet operation and low cost, Kerk lead screw assemblies are your best choice for high performance linear motion control.

Kerk Lead Screws

- Available in standard diameters from 5/64-in (2 mm) to 1 5/16-in (25 mm)
- Standard leads from .012-in to almost 4-in (0.30 mm to 92 mm) including metric and left hand threads
- Custom sizes and leads can be special ordered
- Positional bi-directional repeatability with Kerk anti-backlash nut is within 50 micro-inches (1.25 micron) and standard lead accuracy is better than 0.0006-in./in. (mm/mm)
- Standard lead accuracy of .0006 in/in, with up to .0001 in/in available on selected screws; Contact factory for availability
- Complete in-house manufacturing and quality control assure uniform and consistent products

Kerk Nuts

- Available in 7 standard anti-backlash designs (ZBX, WDG, NTB, KHD, VHD, NTG, ZBA); general purpose BFW Series plus the Mini Series
- Custom nut configurations and mountings are also readily available
- Custom free-wheeling fabricated and milled solutions are available, onsite molding design & production
- The Kerk brand anti-backlash designs provide assemblies which are wear compensating with low frictional drag and exceptional positional repeatability
- Operation to more than 300 million inches of travel can be achieved



Lead Screw Nut Selection

Kerk Lead Screw Assemblies are modified acme thread forms optimized for performance and available in a broad range of lead screw diameters, leads and nut styles, custom designed for your application. Kerk lead screws are self-adjusting, maintenance-free and require no lubrication. Providing maximum accuracy, high reliability, smooth, quiet operation and low cost, Kerk lead screw assemblies are your best choice for high performance linear motion control.

	Units	Nut Styles							
		ZBX	ZBA	ZBM	KHD	WDG	NTB	VHD	BFW
		35	55	1	20	75	200	350	500
Max Dynamic Load	lb	155	245	4.4	89	333	890	1557	2224
Compactness		••	••	•••	••	•••	••	•	•••
Typical Drag Torque		••	••	•••	•••	••	••	•••	N/A
Vibration Damping	[horizontal]	•••	•••	•••	••	•	•	••	N/A
	[vertical]	•••	•••	•••	•	•	•	•	N/A
Smoothness		••	•••	••	••	••	••	••	•
Backlash Compensation		••	•	••	•••	•••	•••	•••	N/A
Drag Adjusted		N/A	•••	N/A	••	N/A	•	••	N/A
Stiffness		••	••	••	•••	•••	•••	•••	N/A
Easy to Modify		••	•	•	•	•	•••	•	•••
Custom Materials Available		••	••	•	•	•	•••	•	•••
Best for Fine Leads	<.25mm	•••	•••	•••	•••	•••	•	•••	•••
Best for Long Leads	>1.25mm	•••	•••	N/A	•••	•••	•••	•••	•••



Lead Screw by Size


Kerk Lead Screws utilize the latest in precision rolling technology. Lead screws are available in standard diameters from 5/64" to 15/16" and includes metric and left hand threads. Most standard lead screws are manufactured from 303 stainless steel and are produced using our exclusive precision rolling process. Other lead screw materials are available for application specific requirements.

Diameter	Lead Range	Units	Dynamic Load by Nut Type									
			ZBX	ZBA	ZBM	KHD	WDG	NTB	VHD	BFW		
5/64 inch (2mm)	0.012-0.079 in (0.3-2.00 mm)				1 (4.4)							10 (44)
1/8 inch (3.2mm)	0.024-0.125 in (0.61-3.18 mm)								5 (22)			25 (111)
0.132 inch (3.3mm)	0.020-0.315 in (0.50-8.00 mm)								5 (22)			25 (111)
9/64 inch (3.6mm)	0.012-0.394 in (0.30-10.00 mm)								5 (22)			25 (111)
5/32 inch (4mm)	0.033-0.500 in (0.84-12.70 mm)								5 (22)			25 (111)
3/16 inch (5mm)	0.020-0.050 in (0.50-12.70 mm)							10 (44)				25 (111)
7/32 inch (5.6mm)	0.024-0.384 in (0.61-9.75 mm)							10 (44)				25 (111)
1/4 inch (6mm)	0.024-1.000 in (0.61-25.4 mm)	lbs	5 (22)	5 (22)				10 (44)				50 (222)
5/16 inch (8mm)	0.039-0.800 in (1.00-20.32 mm)	N	10 (44)	10 (44)			20 (89)	25 (111)				75 (334)
3/8 inch (10mm)	0.025-1.500 in (0.64-38.10 mm)		10 (44)	10 (44)			20 (89)	25 (111)				75 (334)
7/16 inch (11mm)	0.050-0.615 in (1.27-15.62 mm)		15 (67)	15 (67)				75 (334)				90 (400)
1/2 inch (13mm)	0.050-2.000 in (1.27-50.80 mm)		25 (111)	25 (111)				75 (334)				150 (667)
5/8 inch (16mm)	0.100-2.000 in (2.54-50.80 mm)		35 (156)	35 (156)					125 (556)			225 (1001)
3/4 inch (19mm)	0.0625-3.622 in (1.59-92.00 mm)			55 (245)					150 (667)			350 (1557)
7/8 inch (22mm)	0.200-1.000 in (5.08-25.4 mm)			55 (245)					200 (890)			500 (2224)
15/16 inch (24mm)	0.050-3.000 in (1.27-76.20 mm)			55 (245)					200 (890)			500 (2224)


Anti-Backlash Technology

Axial Take-up Mechanism


The standard method for taking up backlash is to bias two nut halves axially using some type of compliant spring. (Wavy washer, compression spring, rubber washer, etc.) The unit is very stiff in the direction in which the nut half is loaded against the flank of the screw thread. However, in the direction away from the screw thread, the nut is only as axially stiff as the amount of preload which the spring exerts.




For example, if the maximum axial load to which the system is subjected is 50 lbs., the amount of spring preload must be equal to, or greater than, 50 lbs. in order to maintain intimate screw/nut contact. The problems arising from preloading in this manner are increased drag torque and nut wear. Obviously, the higher the load at the screw/nut interface, the higher the required torque to drive the nut on the screw and the more susceptible the unit is to nut wear.



An alternate method replaces the spring with a stiff spacer sized to fit exactly between the two nut halves. There is no excessive preload force at the interface and the unit is capable of carrying high axial loads in either direction with no backlash. This is fine initially. However, as use time increases, wear begins on the nut threads causing a gap to develop between the spacer (L) and the nut halves.




This gap $(L + LL)$ is now the amount of backlash which has developed in the unit. This backlash can be removed by replacing the stiff spacer with a new spacer equal to $(L + LL + LL)$. This process, although effective, would be extremely costly and difficult to implement on a continuous basis.



The Solution

What is needed, then, is a stiff spacer which will continually expand to accommodate the wear which occurs during use. This is done by creating a spacer threaded at one end with a complimentary nut torsionally biased to advance when a gap develops. The thread at the end of the spacer is a fine helix such that an axial load will not backdrive the nut once spacer growth has occurred. The preload on the unit is only the amount necessary to turn the spacer nut on the spacer rod and is independent of the external system loadings. We thus have a self-wear compensating unit which has extremely low frictional drag torque yet high axial stiffness.

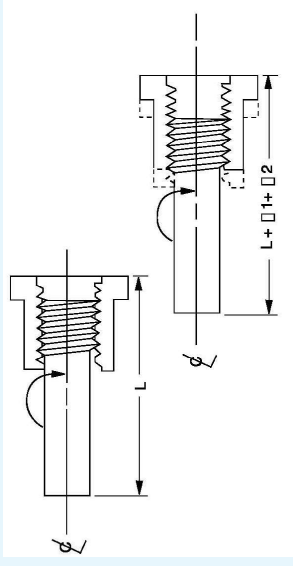

Anti-Backlash Nuts

Haydon Kerk offers a renowned portfolio of anti-backlash designs that create lead screw assemblies which are wear compensating, with low frictional drag and exceptional positional repeatability. Seven standard anti-backlash nut styles cover the range of axial, radial and torsional designs to suit a wide range of applications. Haydon Kerk provides nuts in a wide range of wear resistant, self-lubricating thermoplastic materials.

KHD Nut Series

Eliminates the need for load compensating preload forces. The KHD Series anti-backlash assembly makes use of the Kerk patented AXIAL TAKE-UP MECHANISM (see Lead screw Assemblies: Anti-Backlash Technologies section) to provide backlash compensation. The unique split nut with torsional take-up provides increased load capacity and axial stiffness over comparably sized ZBX units. Although the KHD offers high axial stiffness, frictional drag torque (1-3 oz-in.) is very low. The anti-backlash mechanism in the KHD unit eliminates the need for load compensating preload forces. The assembly consists of a 303 stainless steel screw mated with a self-lubricating polyacetal nut. End machining to customer specifications and Kerkote® TFE screw coating are optional.



KHD Series Nut Assemblies

Technical Data

Material	Polyacetal, Lubricant Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F
Coefficient of Friction Polyacetal Nut to Screw	Static = .08 .08 ** Dynamic = .15 .09 **
Standard Operating Temperature Range	32° - 200° F* (0° - 93° C)*

*Very high or low temperatures may cause significant changes in the nut fit or performance. For more information, contact Kerk Engineering Team at 603-213-6260 for optional temperature range materials.
** with Kerkote® TFE Coating.

Grease Compatibility

Coatings	Compatible
Kerkote® TFE Coating	YES
Black Kerk® TFE Coating	YES
Grease	NO

Anti-Backlash Life

Without Kerkote® TFE Coating inch / cm	With Kerkote® TFE Coating inch / cm
80 to 100 million (200 to 250 million)	160 to 230 million (450 to 580 million)

Anti-backlash life is defined as: the nut's ability to compensate for wear while maintaining 10 zero backlash increments. Above the data is based on 25% of the dynamic load rating. Life will vary with loading, operating environment, and duty cycle. The longer assembly generally provides longer life.

Identifying the KHD Series Nut Part Number Codes when Ordering


KHD Prefix	A Nut Mounting Style	K Lubrication	R Thread Direction	031 Diameter Code	0039 Nominal Thread Lead Code	XXXX Unique Identifier
KHD	A = Hanger (Triangular) T = Threaded X = Custom	S = Uncoated K = Kerkote® TFE Coating N = Nut only B = Black Kerk® TFE Coating	R = Right hand L = Left hand (Not Available for Micro Series) (Refer to lead screw charts for availability)	031 = .313 in (8 mm) 037 = .375 in (10 mm)	(Refer to LEAD CODE Specifications chart, page 3)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.

NOTE: Details must be included in Part Number (+) as shown above. For assistance call our Engineering Team at 603-213-6260.

Dimensional Drawings

KHDA Flange Mount


KHDA Flange Mount	Screw Diam. A	Nut Diam. B	Nut Length C	Flange Diam. D	Flange Thickness E	Thread M*	Thread Length N	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch	inch (mm)	lbs (kg)	oz-in (N-m)
	5/16 (8)	.80 (20.3)	2.2 (55.9)	.75 (19.1)	.05 (1.27)	3/4-20	.35 (8.9)	20 (10)	1-3 (.007-.020)
	3/8 (10)	.80 (20.3)	(55.9)	.75 (19.1)	.05 (1.27)	3/4-20	.35 (8.9)	20 (10)	1-3 (.007-.020)

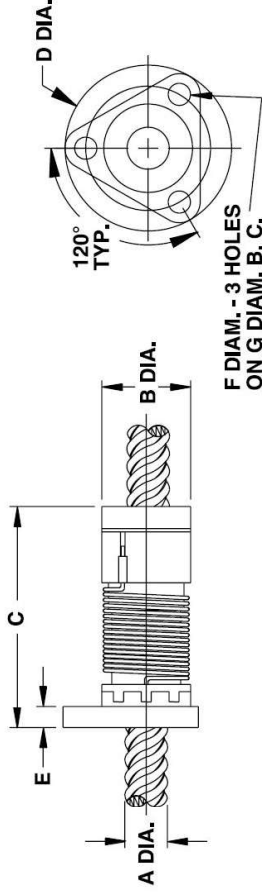

KHDT Thread Mount

KHDT Thread Mount	Screw Diam. A	Nut Diam. B	Nut Length C	Flange Diam. D	Flange Thickness E	Thread M*	Thread Length N	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch	inch (mm)	lbs (kg)	oz-in (N-m)
	5/16 (8)	.80 (20.3)	2.2 (55.9)	.75 (19.1)	.05 (1.27)	3/4-20	.35 (8.9)	20 (10)	1-3 (.007-.020)
	3/8 (10)	.80 (20.3)	2.2 (55.9)	.75 (19.1)	.05 (1.27)	3/4-20	.35 (8.9)	20 (10)	1-3 (.007-.020)

Metric numbers are for reference only.

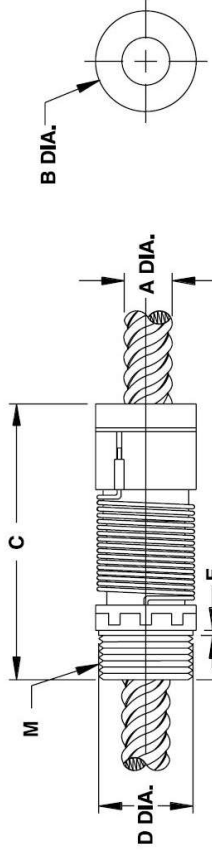

Dimensional Tolerances

Inches	Metric (mm)
.X	< L 4 ± 0.1
.XX	4 < L ≤ 16 ± 0.15
.XXX	16 < L ≤ 63 ± 0.2
	63 < L ≤ 250 ± 0.3

Lead Screw Compatibility: KHD Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
5/16	8	031	0.039	1.00	0039		0.315	8.00	0.281	6.83	34
			0.057	1.44	0057		0.415	8.00	0.243	6.17	43
			0.0741	1.88	0074		0.412	7.92	0.211	5.36	51
			0.111	2.82	0111		0.412	7.92	0.232	5.89	60
			0.167	4.24	0167		0.412	7.92	0.211	5.36	69
			0.250	6.35	0250		0.412	7.92	0.234	5.94	76
			0.500	12.70	0500		0.412	7.92	0.232	5.89	83
			0.800	20.32	0800		0.406	7.77	0.243	6.17	86
			0.925	0.64	0925		0.375	9.55	0.337	8.56	21
			0.039	1.00	0039		0.384	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.55	0.320	8.13	34
			0.050	1.27	0050	•	0.375	9.55	0.301	7.65	36
			0.055	1.40	0055		0.375	9.55	0.303	7.70	38
			0.059	1.50	0059	•	0.389	9.88	0.313	7.95	38
			0.0615	1.59	0063	•	0.388	9.86	0.285	7.49	41
			0.068	1.73	0068		0.388	9.86	0.295	7.49	42
0.079	2.00	0079		0.375	9.55	0.284	6.71	47			
0.0833	2.12	0083		0.375	9.55	0.293	7.44	48			
0.100	2.54	0100	•	0.375	9.55	0.286	6.76	53			
0.125	3.18	0125	•	0.375	9.55	0.295	7.49	59			
0.157	4.00	0157		0.375	9.55	0.274	6.96	65			
0.1867	4.23	0187		0.371	9.42	0.281	6.63	61			
0.197	5.00	0197		0.375	9.55	0.286	6.76	69			
0.200	5.08	0200	•	0.375	9.55	0.296	6.76	69			
0.250	6.35	0250		0.375	9.55	0.288	6.81	70			
0.300	7.62	0300		0.375	9.55	0.295	6.48	76			
0.333	8.46	0333		0.375	9.55	0.245	6.22	78			
0.363	9.22	0363	•	0.375	9.55	0.290	6.60	79			
0.375	9.53	0375		0.375	9.55	0.285	6.73	79			
0.384	10.00	0384		0.375	9.55	0.290	6.60	79			
0.400	10.16	0400		0.375	9.55	0.293	7.44	79			
0.472	12.00	0472		0.388	9.86	0.297	7.29	82			
0.500	12.70	0500	•	0.388	9.86	0.295	6.73	81			
0.667	16.94	0667		0.375	9.55	0.273	6.93	83			
0.667	19.05	0750		0.388	9.86	0.273	6.93	84			
0.884	25.00	0884		0.375	9.55	0.292	6.65	84			
1.000	25.40	1000		0.383	9.73	0.254	6.45	84			
1.200	30.48	1200	•	0.383	9.73	0.234	6.45	84			
1.250	31.75	1250		0.375	9.55	0.278	7.06	84			
1.500	38.10	1500		0.375	9.55	0.284	6.71	83			

* Listed efficiencies are theoretical values based on Kerkote® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screw
 *** Back-drive threshold is 90-10%

Screw sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

NTB Nut Series

For higher load applications, the NTB Series anti-backlash assembly is designed for higher load applications than the ZBX or KHD series units. Using the specially designed take up mechanism, it maintains axial stiffness throughout its life while system torque is held to a minimum. The need to highly pre-load the nut to compensate for load has been eliminated with the Kerk NTB Series assembly.

The nut is manufactured with a self-lubricating polyacetal designed to run efficiently on the precision rolled shafting. Screws are 303 stainless steel and are available with the proprietary long-life Kerkote® TFE coating. The NTB's simple, compact design can be easily modified for custom applications.

The NTB assembly provides low drag torque, high system stiffness, smooth operation, and long life throughout its load and speed range.

NTB Mini Nut Series

Miniature style assemblies, with an "anti-backlash" function. The Mini Series brings Haydon Kerk quality, precision and value to products that were previously off limits to lead screw technology.



NTB Series Nut Assemblies

Technical Data

Material	Polyacetal, Lubricant-Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F
Coefficient of Friction Polyacetal Nut to Screw	Static = .08 .08 ** Dynamic = .15 .09 **
Standard Operating Temperature Range	32 - 200° F* (0 - 93° C)

* Very high or low temperatures may cause significant changes in the nut fit or drag torque. Please call the KRP Engineering Team at 603.213.6290 for optional temperature range materials.
 ** with Kerkote® TFE Coating.

Anti-Backlash Life

Without Kerkote® TFE Coating	With Kerkote® TFE Coating
inch / (cm)	inch / (cm)
100 to 125 million (250 to 315 million)	200 to 250 million (500 to 635 million)

Grease Compatibility

Coatings	Compatible
Kerkote® TFE Coating	YES
Black Ice® TFE Coating	YES
Grease	NO

Identifying the NTB Series Nut Part Number Codes when Ordering

NTB Prefix	T Nut Mounting Style	K Lubrication	R Thread Direction	025 Diameter Code	0050 Nominal Thread Lead Code	XXXX Unique Identifier
NTB	A = Flanged (Triangular) F = Flanged (Round) T = Threaded Mini Series Only: B = Barrel R = Rectangular *NTB Mini Series	S = Uncoated K = Kerkote® TFE Coating N = Nut Only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Not Available for Micro Series) (Refer to lead screw charts for availability)	012 ^o = .125 in. (3.2 mm) 013 ^o = .133 in. (3.3 mm) 014 ^o = .141 in. (3.6 mm) 016 ^o = .156 in. (4 mm) 018 ^o = .188 in. (4.8 mm) 025 = .219 in. (5.6 mm) 029 = .250 in. (6 mm) 031 = .313 in. (8 mm) *NTB Mini Series	(Refer to LEAD CODE Specifications charts, pages 4 to 9)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.


NOTE: Charts must be included in Part Number (P) as shown above. For assistance call our Engineering Team at 603.213.6290.

Dimensional Drawings
NTB Flange Mount

	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Hub Width H inch (mm)	Hub Diam. J inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
NTBA Triangular- Flange	1/4 (6)	.52 (13.2)	1.1 (28)	1.00 (25.4)	.16 (4.0)	.143 (3.63)	.750 (19.1)	.08 (2.0)	.500 (12.7)	10 (4.5)	.5-2 (.004-.014)
	5/16 (8)	.80 (20.3)	1.8 (46)	1.50 (38.1)	.20 (5.1)	.200 (5.08)	1.125 (28.6)	.10 (2.54)	.750 (19.1)	20 (9.1)	1-3 (.007-.02)
	3/8 (10)	.80 (20.3)	1.8 (46)	1.50 (38.1)	.20 (5.1)	.200 (5.08)	1.125 (28.6)	.10 (2.54)	.750 (19.1)	20 (9.1)	1-3 (.007-.02)
	7/16 (11)	.90 (22.9)	1.8 (46)	1.8 (46)	1.62 (41.2)	.23 (5.7)	1.125 (28.6)	.10 (2.54)	.875 (22.2)	30 (13.6)	1-3 (.007-.02)

Metric numbers are for reference only.


	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Hub Width H inch (mm)	Hub Diam. J inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
NTBF Round Flange	1/2 (13)	1.06 (26.9)	2.1 (54)	1.75 (44.5)	.25 (6.4)	.220 (5.59)	1.406 (35.71)	.12 (3.0)	1.00 (25.4)	100 (45.5)	2-6 (.014-.04)
	5/8 (16)	1.36 (34.3)	2.3 (59)	2.13 (54.1)	.28 (7.0)	.220 (5.59)	1.750 (44.45)	.10 (2.54)	1.25 (31.8)	125 (56.8)	2-6 (.014-.04)
	3/4 (19)	1.56 (39.6)	2.7 (67)	2.38 (60.5)	.31 (7.9)	.220 (5.59)	2.000 (50.80)	.10 (2.54)	1.50 (38.1)	150 (68.2)	3-7 (.02-.05)
	7/8 (22)	1.75 (44.5)	2.8 (70)	2.63 (66.8)	.38 (9.5)	.220 (5.59)	2.250 (57.15)	.12 (3.0)	1.75 (44.5)	200 (90.9)	4-8 (.03-.06)
	15/16 (24)	1.75 (44.5)	2.8 (70)	2.83 (70)	.38 (9.5)	.220 (5.59)	2.250 (57.15)	.12 (3.0)	1.75 (44.5)	200 (90.9)	4-8 (.03-.06)

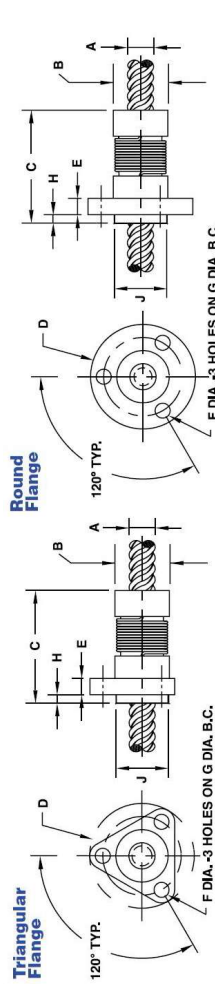

NTB Thread Mount

	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)
NTBT Thread Mount	1/8 (3)	.40 (10.2)	.50 (28)	3/6-24	1.25 (31.8)	5 (2.3)	.5 (0.04)
	1/4 (6)	.52 (13.2)	1.1 (28)	7/16-20	.25 (6.4)	10 (4.5)	.5-2 (.004-.014)
	5/16 (8)	.80 (20.3)	1.8 (45)	3/4-20	.38 (9.5)	20 (9.1)	1-3 (.007-.02)
	3/8 (10)	.80 (20.3)	1.8 (45)	3/4-20	.38 (9.5)	20 (9.1)	1-3 (.007-.02)
	7/16 (11)	.90 (22.9)	1.8 (46)	13/16-16	.38 (9.5)	30 (13.6)	1-3 (.007-.02)
	1/2 (13)	1.06 (26.9)	2.1 (54)	15/16-16	.38 (9.5)	100 (45.5)	2-6 (.014-.04)

	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)
NTBT Thread Mount	5/8 (16)	1.38 (34.9)	2.3 (59)	1 1/8-16	.38 (9.5)	125 (56.8)	2-6 (.014-.04)
	3/4 (19)	1.56 (39.6)	2.7 (67)	1 3/8-16	.50 (12.7)	150 (68.2)	3-7 (.02-.05)
	7/8 (22)	1.75 (44.5)	2.8 (70)	1 9/16-16	.50 (12.7)	200 (90.9)	4-8 (.03-.06)
	15/16 (24)	1.75 (44.5)	2.8 (70)	1 9/16-16	.50 (12.7)	200 (90.9)	4-8 (.03-.06)

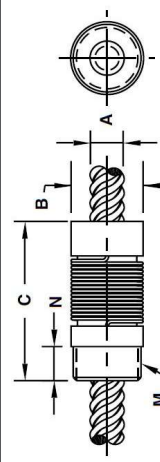


NTB Thread Mount

NTB Mini Flange Mount

	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Height D1 inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
NTBR Flange Mount	1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	0.40 (10.2)	0.75 (19.1)	0.13 (3.2)	0.120 (3.05)	0.600 (15.24)	5 (2.3)	0.5 (.004)


Metric numbers are for reference only.

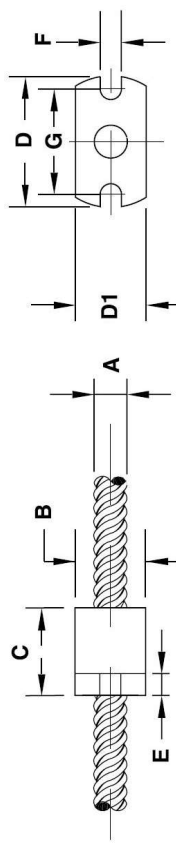

NTB Mini Thread Mount

	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)
NTBT Thread Mount	1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	3/6-24	1.25 (31.8)	5 (2.3)	0.5 (.004)

Metric numbers are for reference only.

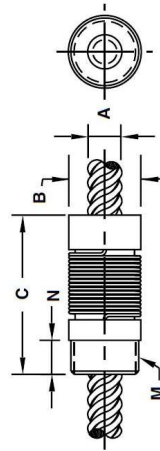

Lead Screw Compatibility: NTB Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/8	3.2	012	0.024	0.61	0024		0.129	3.28	0.093	2.36	44
			0.039	1.00	0039		0.129	3.28	0.094	2.39	57
			0.048	1.22	0048		0.129	3.28	0.093	2.36	61
			0.075	1.91	0075		0.129	3.28	0.093	2.36	70
			0.086	2.44	0086		0.129	3.28	0.093	2.36	75
			0.125	3.18	0125	LH Only	0.125	3.18	0.078	1.98	80
.132	3.3	013	0.020	0.50	0020		0.132	3.35	0.104	2.64	42
			0.039	1.00	0039		0.132	3.35	0.090	2.03	61
			0.079	2.00	0079		0.132	3.35	0.090	2.03	75
			0.157	4.00	0157		0.132	3.35	0.090	2.03	84
			0.315	8.00	0315		0.132	3.35	0.090	2.03	87
			0.612	15.50	0612		0.140	3.56	0.123	3.12	26
9/64	3.6	014	0.024	0.61	0024		0.140	3.56	0.105	2.67	43
			0.048	1.22	0048		0.140	3.56	0.081	2.06	62
			0.086	2.44	0086		0.140	3.56	0.081	2.06	75
			0.094	10.00	0094		0.140	3.56	0.102	2.59	86
			0.093	0.84	0093		0.156	3.96	0.116	2.95	45
			0.050	1.27	0050	LH Only	0.156	3.96	0.086	2.44	59
5/32	4	016	0.094	2.39	0094		0.164	4.17	0.128	3.25	67
			0.125	3.18	0125		0.168	4.27	0.130	3.30	74
			0.250	6.35	0250		0.166	3.96	0.130	3.30	83
			0.375	9.53	0375		0.166	3.96	0.130	3.30	85
			0.500	12.70	0500		0.166	3.96	0.130	3.30	86
			0.620	15.50	0620		0.188	4.78	0.183	4.14	30
3/16	5	018	0.025	0.64	0025		0.188	4.78	0.150	3.81	39
			0.039	1.00	0039		0.188	4.78	0.144	3.66	47
			0.050	1.27	0050		0.188	4.78	0.124	3.15	58
			0.100	2.54	0100		0.188	4.78	0.136	3.45	69
			0.1975	4.76	0188		0.188	4.78	0.167	4.24	78
			0.200	5.08	0200		0.188	4.78	0.124	3.15	82
5/16	8	031	0.375	9.53	0375		0.188	4.78	0.191	4.09	84
			0.400	10.16	0400		0.188	4.78	0.124	3.15	84
			0.427	10.85	0427		0.188	4.78	0.124	3.15	85
			0.500	12.70	0500		0.188	4.78	0.162	4.11	85
			0.600	15.24	0600		0.188	4.78	0.162	4.11	86
			0.620	15.50	0620		0.188	4.78	0.162	4.11	86

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Kerktech® TFE coated lead screws.
 ** Listed efficiencies for Macro screws are theoretical values based on non-coated lead screws.
 *** Back-drive threshold is 90-10%.

Lead Screw Compatibility: NTB Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
7/32	5.6	021	0.024	0.61	0024		0.218	5.54	0.181	4.60	31
			0.03125	0.79	0031		0.204	5.18	0.180	4.06	39
			0.048	1.22	0048		0.216	5.49	0.156	3.96	50
			0.060	1.27	0060		0.200	5.08	0.135	3.43	52
			0.0825	1.59	0083		0.218	5.54	0.142	3.61	60
			0.192	4.88	0192		0.218	5.54	0.156	3.96	78
1/4	6	025	0.0384	0.975	00384		0.204	5.18	0.140	3.56	81
			0.024	0.61	0024		0.218	5.54	0.159	4.04	86
			0.025	0.64	0025		0.250	6.35	0.218	5.54	28
			0.03125	0.79	0031		0.250	6.35	0.208	5.28	30
			0.039	1.00	0039		0.250	6.35	0.190	4.83	40
			0.048	1.22	0048		0.250	6.35	0.190	4.83	45
5/16	8	031	0.050	1.27	0050		0.250	6.35	0.191	4.85	46
			0.059	1.50	0059		0.250	6.35	0.172	4.37	52
			0.0825	1.59	0083		0.250	6.35	0.170	4.32	52
			0.079	2.00	0079		0.250	6.35	0.170	4.32	59
			0.096	2.44	0096		0.250	6.35	0.190	4.83	61
			0.100	2.54	0100		0.250	6.35	0.190	4.83	62
3/8	9.53	0375	0.118	3.00	0118		0.250	6.35	0.175	4.45	68
			0.125	3.18	0125		0.250	6.35	0.190	4.83	67
			0.197	5.00	0197		0.250	6.35	0.172	4.37	72
			0.200	5.08	0200		0.250	6.35	0.170	4.32	65
			0.250	6.35	0250		0.250	6.35	0.168	4.27	79
			0.3125	7.94	0313		0.250	6.35	0.184	4.67	81
1/2	12.70	0500	0.333	8.46	0333		0.250	6.35	0.170	4.32	82
			0.384	10.00	0384		0.250	6.35	0.170	4.32	78
			0.400	10.16	0400		0.250	6.35	0.170	4.32	84
			0.500	12.70	0500		0.250	6.35	0.169	4.29	85
			0.750	19.05	0750		0.250	6.35	0.170	4.32	86
			1.000	25.40	1000		0.250	6.35	0.170	4.32	84
5/8	15.88	0625	0.039	1.00	0039		0.315	8.00	0.261	6.63	34
			0.067	1.44	0067		0.315	8.00	0.243	6.17	43
			0.0741	1.88	0074		0.312	7.92	0.211	5.36	51
			0.111	2.82	0111		0.312	7.92	0.232	5.89	60
			0.167	4.24	0167		0.312	7.92	0.211	5.36	69
			0.250	6.35	0250		0.312	7.92	0.234	5.94	76
3/4	19.05	0600	0.500	12.70	0500		0.312	7.92	0.232	5.89	83
			0.600	15.24	0600		0.306	7.77	0.243	6.17	86

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Kerktech® TFE coated lead screws.
 ** Listed efficiencies for Macro screws are theoretical values based on non-coated lead screws.
 *** Back-drive threshold is 90-10%.

Lead Screw Compatibility: NTB Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/8	10	037	0.025	0.64	0025		0.375	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.53	0.320	8.13	34
			0.050	1.27	0050	•	0.375	9.53	0.301	7.65	38
			0.065	1.40	0065		0.375	9.53	0.303	7.70	38
			0.069	1.50	0069	•	0.389	9.86	0.313	7.95	38
			0.0825	1.59	0083	•	0.388	9.86	0.295	7.49	41
			0.088	1.73	0088		0.388	9.86	0.295	7.49	42
			0.079	2.00	0079		0.375	9.53	0.284	6.71	47
			0.0833	2.12	0083		0.375	9.53	0.293	7.44	48
			0.100	2.54	0100	•	0.375	9.53	0.286	6.76	53
			0.125	3.18	0125	•	0.375	9.53	0.295	7.49	59
			0.157	4.00	0157		0.375	9.53	0.274	6.96	65
			0.1867	4.23	0167		0.371	9.42	0.291	6.63	61
			0.197	5.00	0197		0.375	9.53	0.286	6.76	69
			0.200	5.08	0200	•	0.375	9.53	0.286	6.76	69
			0.250	6.35	0250		0.375	9.53	0.288	6.81	70
			0.300	7.62	0300		0.375	9.53	0.295	6.48	76
0.333	8.46	0333		0.375	9.53	0.245	6.22	78			
0.363	9.22	0363	•	0.375	9.53	0.260	6.60	79			
0.375	9.53	0375		0.375	9.53	0.285	6.73	79			
0.384	10.00	0384		0.375	9.53	0.290	6.60	79			
0.400	10.16	0400		0.375	9.53	0.293	7.44	79			
0.472	12.00	0472		0.388	9.86	0.297	7.29	82			
0.500	12.70	0500		0.388	9.86	0.285	6.73	81			
0.667	16.94	0667		0.375	9.53	0.273	6.93	83			
0.667	16.94	0750		0.388	9.86	0.273	6.93	83			
0.667	16.94	0884		0.375	9.53	0.292	6.65	84			
1.000	25.40	1000		0.383	9.73	0.294	6.45	84			
1.200	30.48	1200	•	0.383	9.73	0.294	6.45	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.294	6.71	83			
0.650	1.27	0650		0.437	11.10	0.362	9.19	30			
0.625	1.59	0625	•	0.436	11.07	0.358	9.69	38			
0.679	2.00	0679		0.472	11.99	0.374	9.50	42			
0.111	2.82	0111		0.437	11.10	0.327	8.31	52			
0.118	3.00	0118		0.458	11.13	0.363	9.22	52			
0.125	3.18	0125		0.438	11.13	0.357	9.07	54			
0.197	5.00	0197		0.458	11.13	0.315	8.00	65			
0.236	6.00	0236		0.433	11.00	0.313	7.95	70			
0.250	6.35	0250		0.442	11.23	0.325	8.26	70			
0.307	7.80	0307		0.445	11.30	0.343	8.71	73			
0.325	8.26	0325		0.444	11.28	0.342	8.69	74			
0.384	10.00	0384		0.446	11.33	0.331	8.41	78			
0.472	12.00	0472		0.438	11.13	0.318	8.08	80			
0.500	12.70	0500		0.452	11.48	0.327	8.31	80			
0.615	15.62	0615		0.475	12.07	0.376	9.55	82			

* Letter efficiencies are theoretical values based on Kenetek® TFE coated flat screw
 ** Lead efficiencies for flat screws are theoretical values based on non-coated flat screws
 *** Base-case threadform is 50% to 10%

Standard sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: NTB Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/2	13	050	0.050	1.27	0050		0.485	12.57	0.433	11.00	29
			0.079	2.00	0079		0.473	12.01	0.385	9.02	41
			0.088	2.50	0088		0.500	12.70	0.380	9.73	46
			0.100	2.54	0100	•	0.490	12.45	0.384	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.384	9.75	58
			0.160	4.06	0160		0.500	12.70	0.388	9.86	67
			0.1867	4.23	0167		0.500	12.70	0.384	9.75	58
			0.197	5.00	0197		0.500	12.70	0.385	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.386	9.30	63
			0.250	6.35	0250		0.500	12.70	0.392	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.362	9.19	73
			0.384	10.00	0384		0.497	12.62	0.362	9.19	76
			0.400	10.16	0400		0.497	12.62	0.384	9.25	76
			0.488	12.40	0488		0.488	12.40	0.392	8.94	79
			0.500	12.70	0500		0.500	12.70	0.374	9.50	80
			0.750	19.05	0750		0.525	13.34	0.399	10.13	83
			0.800	20.32	0800		0.500	12.70	0.370	9.40	83
0.884	25.00	0884		0.500	12.70	0.369	9.37	84			
1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85			
2.000	50.80	2000		0.488	12.40	0.378	9.69	87			
0.100	2.54	0100		0.615	15.62	0.498	12.65	40			
0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45			
0.200	5.08	0200		0.625	15.88	0.465	12.57	53			
0.250	6.35	0250		0.625	15.88	0.469	11.91	63			
0.315	8.00	0315		0.627	15.93	0.493	12.52	68			
0.410	10.41	0410	•	0.625	15.88	0.481	12.22	72			
0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76			
0.630	16.00	0630		0.625	15.88	0.481	12.47	78			
1.000	25.40	1000		0.625	15.88	0.481	12.22	83			
1.500	38.10	1500		0.625	15.88	0.489	12.67	85			
1.575	40.00	1575	•	0.625	15.88	0.499	12.67	86			
2.100	50.80	2100	•	0.625	15.88	0.489	12.67	86			

* Letter efficiencies are theoretical values based on Kenetek® TFE coated flat screw
 ** Lead efficiencies for flat screws are theoretical values based on non-coated flat screws
 *** Base-case threadform is 50% to 10%

Standard sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: NTB Series

Diameter inches	Diameter mm	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/4	19	0.0025	1.59	0083		0.750	19.05	0.671	17.04	25
		0.008	2.50	0098		0.742	18.85	0.656	15.90	35
		0.100	2.54	0100	•	0.746	18.95	0.624	15.85	35
		0.1867	4.23	0167		0.727	18.47	0.645	16.38	47
		0.197	5.00	0197		0.745	18.92	0.624	15.85	51
		0.200	5.08	0200		0.741	18.82	0.652	16.05	52
		0.250	6.35	0250		0.731	18.57	0.639	16.23	57
		0.276	7.00	0276		0.750	19.05	0.624	15.85	59
		0.333	8.46	0333		0.750	19.05	0.624	15.85	64
		0.384	10.00	0384		0.745	18.82	0.619	15.72	67
		0.500	12.70	0500		0.744	18.80	0.624	15.85	73
		0.581	14.00	0581		0.750	19.05	0.624	15.85	73
		0.591	15.00	0591		0.749	19.02	0.623	15.82	74
		0.709	18.00	0709		0.760	19.81	0.650	16.51	77
		0.748	19.00	0748		0.672	17.07	0.547	13.89	80
		0.787	20.00	0787		0.700	19.81	0.648	16.46	78
0.800	20.32	0800		0.750	19.05	0.618	15.70	79		
0.845	21.00	0845		0.734	18.64	0.633	16.08	80		
1.000	25.40	1000		0.743	18.87	0.619	15.72	81		
1.500	38.10	1500		0.712	18.08	0.590	14.99	84		
1.969	50.00	1969		0.751	19.08	0.650	15.75	84		
2.000	50.80	2000		0.742	18.85	0.611	15.52	84		
2.400	60.96	2400		0.750	19.05	0.620	15.75	84		
3.822	92.00	3822		0.750	19.05	0.634	16.10	87		
0.200	5.08	0200		0.870	22.10	0.742	18.85	48		
0.238	6.00	0238		0.848	21.54	0.773	19.03	52		
0.250	6.35	0250		0.875	22.23	0.749	19.02	53		
0.384	10.00	0384		0.875	22.23	0.741	18.82	65		
0.500	12.70	0500		0.862	21.89	0.744	18.90	69		
0.830	16.00	0830		0.875	22.23	0.741	18.82	73		
0.867	16.94	0867		0.871	22.12	0.745	18.92	74		
0.787	20.00	0787		0.875	22.23	0.741	18.82	78		
0.945	24.00	0945		0.875	22.23	0.741	18.82	79		
1.000	25.40	1000		0.871	22.12	0.742	18.85	80		
0.650	1.27	0650		0.898	23.83	0.874	22.20	17		
2.000	50.80	2000		0.827	23.55	0.815	20.70	85		
3.000	76.20	3000		0.939	23.85	0.813	20.40	86		

* Listed efficiencies are theoretical values based on Kerkote® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 60% - 10%

Should sizes have been translated from their designed inch to mm dimension to an equivalent mm or inch dimension.

NTG Nut Series

Compact size, zero backlash, minimal drag torque. The adjustable NTG Series offers a cost effective anti-backlash assembly for applications requiring precise positional accuracy, repeatability, and smoothness. The NTG has been developed specifically for demanding applications that require zero backlash with minimal drag torque. With its compact size and no moving components, the NTG can also be easily incorporated into customer specified, custom molded parts.

An integral part of the NTG design is the ability to manually adjust the drag torque setting to match specific requirements of the application. This drag torque can also be set at the factory to meet individual customer specifications. This is especially effective with fine leads.

The standard NTG unit utilizes a self-lubricating polyacetal nut on a precision rolled 303 stainless steel screw. End machining to customer specifications and Kerkote® TFE screw coating are optional.

NTG Mini Nut Series

The NTG Mini Series brings quality, precision and value to miniature lead screw assemblies that require a small-scale anti-backlash function and control of drag torque.



Technical Data

Material	Polycrystal, Lubricant/Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 X 10 ⁻⁵ in/in/°F
Coefficient of Friction Polycrystal Nut to Screw	Static = .08 Dynamic = .15
Standard Operating Temperature Range	32 - 200° F (0 - 93° C)

* Very high or low temperatures may cause significant changes in the nut fit or drag torque. Please call our Engineering team at 603 213 6290 for optional coatings.
 ** with Kerkote® TFE Coating.

Anti-Backlash Life

Without Kerkote® TFE Coating	With Kerkote® TFE Coating
Inch / (cm)	Inch / (cm)
5 to 10 million (12 to 25 million)	15 to 40 million (38 to 100 million)

Anti-backlash life is defined as the total number of revolutions for one complete cycle of zero backlash properties. Above life data is based on 25% of the dynamic load rating. Life will vary with loading, operating environment, and duty cycle. The longer screw leads generally provide longer life.

Grease Compatibility

Coatings	Compatible
Kerkote® TFE Coating	YES
Black Ink® TFE Coating	YES
Grease	YES

Identifying the NTG Series Nut Part Number Codes when Ordering

NTG	A	K	R	025	0050	XXXX
Prefix	Nut Mounting Style	Lubrication	Thread Direction	Diameter Code	Nominal Thread Lead Code	Unique Identifier
NTG	A = Flanged (Triangular) T = Threaded X = Custom Mini Series Only: B = Barrel R = Rectangular **	S = Uncoated K = Kerkote® TFE Coating N = Nut only B = Black Ink® TFE Coating	R = Right hand L = Left hand (Not Available for Micro Series) (Refer to lead screw charts for availability)	012 ^{***} = .125 in (3.2 mm) 015 = .153 in (3.9 mm) 018 = .181 in (4.6 mm) 019 = .195 in (4.9 mm) 019 = .188 in (4.8 mm) 021 = .219 in (5.6 mm) 025 = .250 in (6.4 mm) 031 = .313 in (8 mm) 037 = .375 in (9.5 mm)	(Refer to LEAD CODE Specifications charts, pages 4 to 6)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.


NOTE: Diameters must be included in Part Number (H) as shown above. For assistance call our Engineering team at 603 213 6290.

Dimensional Drawings

NTG Flange Mount

NTGA Flange Mount	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
	1/4 (6)	.52 (13.2)	.8 (20.3)	1.00 (25.4)	.16 (4.0)	.143 (3.63)	.750 (19.1)	10 (4.5)	.5-2 (.004-.014)
	5/16 (8)	.80 (20.3)	1.0 (25.4)	1.50 (38.1)	.20 (5.1)	.197 (5.00)	1.125 (28.6)	20 (9.1)	1-3 (.007-.02)
	3/8 (10)	.80 (20.3)	1.0 (25.4)	1.50 (38.1)	.20 (5.1)	.197 (5.00)	1.125 (28.6)	20 (9.1)	1-3 (.007-.02)


Metric numbers are for reference only.

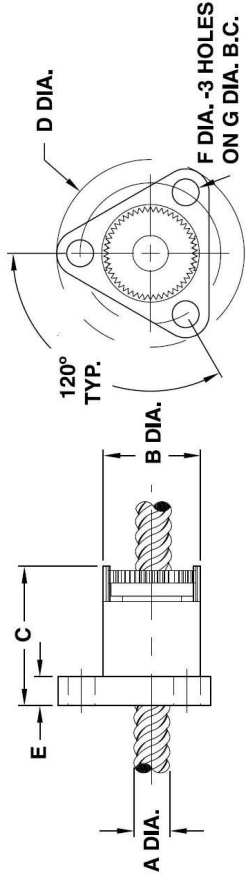

NTG Thread Mount

NTGT Thread Mount	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)
	1/4 (6)	.520 (13.2)	.9 (22)	7/16 - 20	.250 (6.35)	10 (4.5)	.5-2 (.004-.014)
	5/16 (8)	.800 (20.3)	1.2 (30)	3/4 - 20	.375 (9.53)	20 (9.1)	1-3 (.007-.02)
	3/8 (10)	.800 (20.3)	1.2 (30)	3/4 - 20	.375 (9.53)	20 (9.1)	1-3 (.007-.02)

Metric numbers are for reference only.

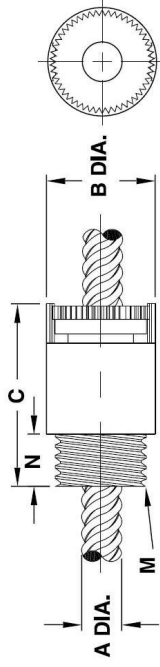


Dimensional Tolerances

Inches	Metric (mm)
.X ± .02	< L 4 ± 0.1
.XX ± .010	4 < L ≤ 16 ± 0.15
.XXX ± .005	16 < L ≤ 63 ± 0.2
	63 < L ≤ 250 ± 0.3

NTG Mini Flange Mount

NTGR Mini Flange Mount	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Height D1 inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
	1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	0.40 (10.2)	0.75 (19.1)	0.13 (3.2)	0.120 (3.05)	0.600 (15.24)	5 (2.3)	0.5 (.004)


Metric numbers are for reference only.

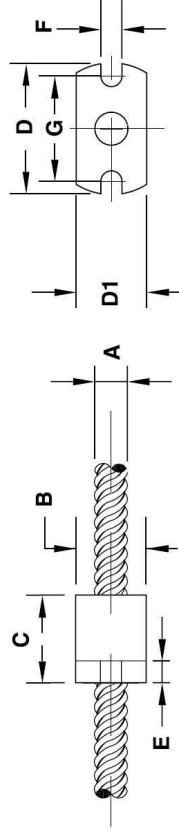

NTG Mini Thread Mount

NTGT Thread Mount	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)
	1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	3/8-24	0.160 (4.06)	5 (2.3)	0.5 (.004)

Metric numbers are for reference only.

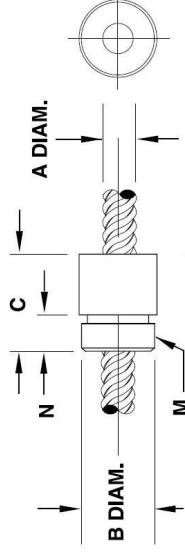

Lead Screw Compatibility: NTG Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/8	3.2	012	0.024	0.61	0024		0.129	3.28	0.083	2.36	44
			0.039	1.00	0039		0.129	3.28	0.094	2.39	57
			0.048	1.22	0048		0.129	3.28	0.083	2.36	61
			0.075	1.91	0075		0.129	3.28	0.089	2.36	70
			0.086	2.44	0086		0.129	3.28	0.083	2.36	75
			0.125	3.18	0125	LH Only	0.125	3.18	0.078	1.98	80
			0.200	5.08	0200		0.132	3.35	0.104	2.64	42
3/32	3.3	013	0.039	1.00	0039		0.132	3.35	0.080	2.03	61
			0.079	2.00	0079		0.132	3.35	0.080	2.03	75
			0.157	4.00	0157		0.132	3.35	0.080	2.03	84
			0.315	8.00	0315		0.140	3.56	0.080	2.03	87
			0.612	15.55	0612		0.140	3.56	0.123	3.12	26
			0.924	23.46	0924		0.140	3.56	0.105	2.67	43
			1.408	35.76	1408		0.140	3.56	0.081	2.06	62
9/64	3.6	014	0.096	2.44	0096		0.140	3.56	0.081	2.06	75
			0.192	4.88	0192		0.140	3.56	0.102	2.59	86
			0.384	9.75	0384		0.140	3.56	0.116	2.95	45
			0.633	16.18	0633	LH Only	0.156	3.96	0.086	2.44	59
			0.950	24.13	0950		0.164	4.17	0.128	3.25	67
			1.425	36.18	1425		0.168	4.27	0.130	3.30	74
			2.130	54.15	2130		0.156	3.96	0.130	3.30	83
5/32	4	016	0.375	9.53	0375		0.156	3.96	0.130	3.30	85
			0.500	12.70	0500		0.156	3.96	0.130	3.30	86
			0.625	15.88	0625		0.188	4.78	0.163	4.14	30
			0.950	24.13	0950		0.188	4.78	0.150	3.81	39
			1.425	36.18	1425		0.188	4.78	0.144	3.66	47
			2.130	54.15	2130		0.188	4.78	0.124	3.15	58
			3.175	80.66	3175		0.188	4.78	0.136	3.45	69
3/16	5	018	0.1875	4.76	0188		0.188	4.78	0.167	4.24	78
			0.200	5.08	0200		0.188	4.78	0.124	3.15	82
			0.375	9.53	0375		0.188	4.78	0.161	4.09	84
			0.400	10.16	0400		0.188	4.78	0.124	3.15	84
			0.427	10.85	0427		0.188	4.78	0.162	4.11	85
			0.500	12.70	0500		0.188	4.78	0.142	3.61	85
			0.625	15.88	0625		0.188	4.78	0.144	3.66	85
7/32	5.6	021	0.024	0.61	0024		0.218	5.54	0.181	4.69	31
			0.03125	0.79	0031		0.204	5.18	0.160	4.06	39
			0.048	1.22	0048		0.216	5.49	0.186	4.69	50
			0.050	1.27	0050		0.200	5.08	0.135	3.43	52
			0.0625	1.59	0063		0.218	5.54	0.142	3.61	60
			0.066	1.68	0066		0.218	5.54	0.156	3.96	66
			0.192	4.88	0192		0.218	5.54	0.156	3.96	78
0.250	6.35	0250		0.204	5.18	0.140	3.56	81			
	0.384	0384		0.218	5.54	0.159	4.04	86			

* Listed efficiencies are theoretical values based on Kerk® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-sine threshold is 95-10%

Lead Screw Compatibility: NTG Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/4	6	025	0.024	0.61	0024		0.250	6.35	0.218	5.54	28
			0.025	0.64	0025		0.250	6.35	0.214	5.44	30
			0.03125	0.79	0031		0.250	6.35	0.208	5.28	34
			0.039	1.00	0039		0.250	6.35	0.190	4.83	40
			0.048	1.22	0048		0.250	6.35	0.190	4.83	45
			0.050	1.27	0050		0.250	6.35	0.191	4.85	46
			0.0625	1.59	0063		0.250	6.35	0.172	4.37	52
			0.0625	1.59	0063		0.250	6.35	0.170	4.32	52
			0.079	2.00	0079		0.250	6.35	0.170	4.32	59
			0.086	2.44	0086		0.250	6.35	0.190	4.83	61
			0.100	2.54	0100		0.250	6.35	0.190	4.83	62
			0.118	3.00	0118		0.250	6.35	0.175	4.45	68
			0.125	3.18	0125		0.250	6.35	0.190	4.83	67
			0.197	5.00	0197		0.250	6.35	0.172	4.37	72
0.200	5.08	0200		0.250	6.35	0.170	4.32	65			
5/16	8	031	0.250	6.35	0250		0.250	6.35	0.188	4.77	79
			0.3125	7.94	0313		0.250	6.35	0.184	4.67	81
			0.333	8.46	0333		0.250	6.35	0.170	4.32	82
			0.384	9.75	0384		0.250	6.35	0.170	4.32	78
			0.400	10.16	0400		0.250	6.35	0.170	4.32	84
			0.500	12.70	0500		0.250	6.35	0.169	4.29	85
			0.750	19.05	0750		0.250	6.35	0.170	4.32	86
			1.000	25.40	1000		0.250	6.35	0.170	4.32	84
			0.039	1.00	0039		0.315	8.00	0.261	6.63	34
			0.067	1.44	0067		0.315	8.00	0.243	6.17	43
			0.074	1.88	0074		0.312	7.92	0.211	5.36	51
			0.111	2.82	0111		0.312	7.92	0.232	5.89	60
			0.167	4.24	0167		0.312	7.92	0.211	5.36	69
			0.250	6.35	0250		0.312	7.92	0.234	5.94	76
0.500	12.70	0500		0.312	7.92	0.222	5.69	83			
0.800	20.32	0800		0.306	7.77	0.243	6.17	86			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
 * Listed efficiencies are theoretical values based on Kerk® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-sine threshold is 95-10%

Lead Screw Compatibility: NTG Series

Diameter Inches	Diameter mm	Diameter Code	Lead Inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) Inches	Outside Diameter (for reference) mm	Root Diameter (for reference) Inches	Root Diameter (for reference) mm	Efficiency %*
3/8	10	037	0.025	0.64	0025		0.375	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.53	0.320	8.13	34
			0.050	1.27	0050	•	0.375	9.53	0.301	7.65	36
			0.055	1.40	0055		0.375	9.53	0.303	7.70	38
			0.059	1.50	0059	•	0.389	9.86	0.313	7.95	38
			0.0625	1.59	0063	•	0.388	9.86	0.295	7.49	41
			0.068	1.73	0068		0.388	9.86	0.295	7.49	42
			0.079	2.00	0079		0.375	9.53	0.284	6.71	47
			0.0893	2.12	0083		0.375	9.53	0.293	7.44	48
			0.100	2.54	0100	•	0.375	9.53	0.286	6.76	53
			0.125	3.18	0125	•	0.375	9.53	0.295	7.49	59
			0.157	4.00	0157		0.375	9.53	0.274	6.96	65
			0.1867	4.23	0167		0.371	9.42	0.281	6.63	61
			0.197	5.00	0197		0.375	9.53	0.286	6.76	69
			0.200	5.08	0200	•	0.375	9.53	0.286	6.76	69
			0.250	6.35	0250		0.375	9.53	0.288	6.81	70
			0.300	7.62	0300		0.375	9.53	0.255	6.48	76
			0.333	8.46	0333		0.375	9.53	0.245	6.22	78
			0.363	9.22	0363		0.375	9.53	0.260	6.60	79
0.375	9.53	0375		0.375	9.53	0.265	6.73	79			
0.384	10.00	0384		0.375	9.53	0.260	6.60	79			
0.400	10.16	0400		0.375	9.53	0.283	7.44	79			
0.472	12.00	0472		0.388	9.86	0.297	7.29	82			
0.500	12.70	0500		0.388	9.86	0.285	6.73	81			
0.667	16.94	0667		0.375	9.53	0.273	6.93	83			
0.667	16.94	0750		0.388	9.86	0.273	6.93	84			
0.884	25.00	0884		0.375	9.53	0.292	6.65	84			
1.000	25.40	1000		0.383	9.73	0.294	6.45	84			
1.200	30.48	1200		0.383	9.73	0.294	6.45	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.294	6.71	83			

Shaded areas have been transcribed from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Lead efficiencies are theoretical values based on KerKote® TFE coated lead screw.
 ** Lead efficiencies for Micro screws are theoretical values based on uncoated lead screws
 *** Back-drive threshold is 50-10%.

VHD Nut Series

The VHD Series anti-backlash assembly provides the maximum load carrying capability and the highest axial and radial stiffness of any KerKote® nut assembly. Designed for smooth, quiet operation and long life, the VHD assembly provides low drag torque by making use of the patented KerK AXIAL TAKE-UP MECHANISM (see Lead screw Assemblies: Anti-Backlash Technologies section). Drag and wear associated with high pre-load forces are eliminated with the VHD Series. Screws are 303 stainless steel with KerK's custom KerKote® TFE extended life coating optional. Assemblies are available cut-to-length or with screws machined to your requirements.



VHD Series Nut Assemblies

VHD Series Nut

Technical Data

Material	Polyacetal, Lubricant Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/F
Coefficient of Friction Polyacetal Nut to Screw	Static = .08 ** Dynamic = .15 .09 **
Standard Operating Temperature Range	32 - 200° F* (0 - 93° C)*

*Very high or low temperatures may cause significant changes in the nut fit or performance. For more information, contact our Engineering Team at 603.213.6390 for optional temperature range material.
 ** With KerKote® TFE Coating.

Grease Compatibility

Coatings	Compatible
KerKote® TFE Coating	YES
Black Ice® TFE Coating	YES
Grease	NO

Anti-Backlash Life

Without KerKote® TFE Coating inch / (cm)	200 to 225 million (500 to 570 million)
With KerKote® TFE Coating inch / (cm)	300 to 350 million (750 to 880 million)

Anti-backlash life is defined as the nut's ability to compensate for wear while maintaining its zero backlash performance. Above the data is based on 25% of the dynamic load rating. Life will vary with bearing, operating environment, and duty cycle. The longer screw leads generally provide longer life.

Identifying the VHD Series Nut Part Number Codes when Ordering

VHD Prefix	F Nut Mounting Style	S Lubrication	R Thread Direction	062 Diameter Code	0125 Nominal Thread Lead Code	XXXX Unique Identifier
VHD	F = Flanged (Round) T = Threaded X = Custom	S = Uncoated K = KerKote® TFE Coating N = Nut only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Not Available for Micro Series) (Refer to lead screw charts for availability)	050 = .500 in. (13 mm) 062 = .625 in. (16 mm) 075 = .750 in. (19 mm) 087 = .875 in. (22 mm)	(Refer to LEAD CODE Specifications charts, pages 3 to 4)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.


NOTE: Details must be included in Part Number (F) as shown above. For assistance call our Engineering Team at 603.213.6390.

Dimensional Drawings

VHD Flange Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Hub Width H inch (mm)	Hub Diam. J inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
1/2 (13)	1.12 (28.5)	2.3 (59)	1.75 (44.5)	.23 (5.9)	.22 (5.60)	1.406 (35.71)	.12 (3.1)	.93 (23.62)	150 (68)	2-6 (0.14-0.02)
5/8 (16)	1.38 (35.1)	2.6 (66)	2.08 (53)	.28 (7.1)	.22 (5.60)	1.750 (44.45)	N/A	N/A	250 (113)	2-6 (0.14-0.02)
3/4 (19)	1.62 (41.2)	2.8 (71)	2.38 (60.5)	.31 (7.9)	.22 (5.60)	2.000 (50.80)	N/A	N/A	350 (159)	3-7 (.02-.05)
7/8 (22)	1.62 (41.2)	2.8 (71)	2.38 (60.5)	.31 (7.9)	.22 (5.60)	2.000 (50.80)	N/A	N/A	350 (159)	3-7 (.02-.05)

Metric numbers are for reference only.

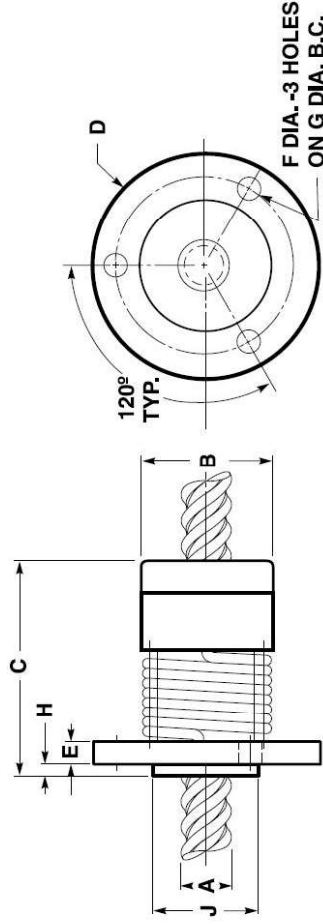


F DIA.-3 HOLES
ON G DIA. B.C.

VHD Thread Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread N ^o inch (mm)	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque oz-in (N-m)	Dimensional Tolerances	
							Inches	Metric (mm)
1/2 (13)	1.12 (28.5)	2.5 (64)	15/16-16	.50 (12.7)	150 (68)	2-6 (0.14-.04)	.X ± .02	< L 4 ± 0.1
5/8 (16)	1.38 (35.1)	2.8 (72)	1 1/4-16	.50 (12.7)	250 (113)	2-6 (0.14-.04)	.XX ± .010	4 < L ≤ 16 ± 0.15
3/4 (19)	1.62 (41.2)	3.12 (79)	1 3/8-16	.50 (12.7)	350 (159)	3-7 (.02-.05)	.XXX ± .005	16 < L ≤ 63 ± 0.2
7/8 (22)	1.62 (41.2)	3.12 (79)	1 3/8-16	.50 (12.7)	350 (159)	3-7 (.02-.05)		63 < L ≤ 250 ± 0.3

Metric numbers are for reference only.

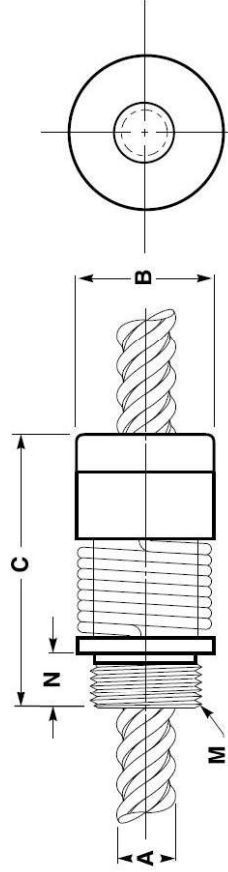

Lead screw Compatibility: VHD Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
			0.050	1.27	0650		0.496	12.57	0.433	11.00	29
			0.079	2.00	0079		0.473	12.01	0.355	9.02	41
			0.088	2.50	0088		0.500	12.70	0.383	9.73	46
			0.100	2.54	0100	•	0.490	12.45	0.364	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.384	9.75	58
			0.160	4.06	0160		0.500	12.70	0.388	9.86	67
			0.1697	4.23	0167		0.500	12.70	0.384	9.75	58
			0.197	5.00	0197		0.500	12.70	0.395	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.366	9.30	63
			0.250	6.35	0250		0.500	12.70	0.382	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.362	9.19	73
			0.384	10.00	0384		0.497	12.62	0.362	9.19	76
			0.400	10.16	0400		0.497	12.62	0.364	9.25	76
			0.500	12.70	0500		0.488	12.40	0.352	8.94	79
			0.630	16.00	0630		0.500	12.70	0.374	9.50	80
			0.750	19.05	0750		0.525	13.34	0.399	10.13	83
			0.800	20.32	0800		0.500	12.70	0.370	9.40	83
			0.984	25.00	0984		0.500	12.70	0.369	9.37	84
			1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84
			1.500	38.10	1500		0.480	12.45	0.374	9.50	85
			2.000	50.80	2000		0.488	12.40	0.378	9.60	87
			0.100	2.54	0100		0.515	15.62	0.498	12.65	40
			0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45
			0.200	5.08	0200		0.625	15.88	0.495	12.57	53
			0.250	6.35	0250		0.625	15.88	0.469	11.91	63
			0.315	8.00	0315		0.627	15.93	0.493	12.52	68
			0.410	10.41	0410	•	0.625	15.88	0.481	12.22	72
			0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76
			0.630	16.00	0630		0.625	15.88	0.481	12.47	78
			1.000	25.40	1000		0.625	15.88	0.481	12.22	83
			1.500	38.10	1500		0.625	15.88	0.489	12.67	85
			1.575	40.00	1575	•	0.625	15.88	0.499	12.67	86
			2.000	50.80	2000	•	0.625	15.88	0.499	12.67	86

* Letter efficiencies are theoretical values based on Kerker® TFC coated flat screw
 ** Letter efficiencies for these screws are theoretical values based on non-coated flat screws
 *** Base-case thread is 3-7-10%

Standard sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: VHD Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/4	19	075	0.0925	1.59	0063		0.750	19.05	0.671	17.04	35
			0.098	2.50	0088		0.742	18.85	0.626	15.90	25
			0.100	2.54	0100		0.746	18.95	0.624	15.85	35
			0.1867	4.23	0167	•	0.727	18.47	0.645	16.38	47
			0.197	5.00	0197		0.745	18.92	0.624	15.85	51
			0.200	5.08	0200		0.741	18.82	0.622	16.05	52
			0.250	6.35	0250		0.731	18.57	0.639	16.23	57
			0.276	7.00	0276		0.750	19.05	0.624	15.85	59
			0.333	8.46	0333		0.750	19.05	0.624	15.85	64
			0.384	10.00	0384		0.745	18.92	0.619	15.72	67
			0.500	12.70	0500		0.744	18.90	0.624	15.85	73
			0.551	14.00	0551		0.750	19.05	0.624	15.85	73
7/8	22	087	0.391	15.00	0391		0.749	19.02	0.663	15.82	74
			0.709	18.00	0709		0.760	19.81	0.650	16.51	77
			0.748	19.00	0748		0.672	17.07	0.547	13.89	80
			0.787	20.00	0787		0.760	19.81	0.648	16.46	78
			0.800	20.32	0800		0.750	19.05	0.618	15.70	79
			0.845	24.00	0845		0.724	18.64	0.633	16.08	80
			1.000	25.40	1000	•	0.743	18.87	0.619	15.72	81
			1.500	38.10	1500	•	0.712	18.08	0.590	14.99	84
			1.969	50.00	1969	•	0.751	19.88	0.620	15.75	84
			2.000	50.80	2000	•	0.742	18.85	0.611	15.52	84
			2.400	60.96	2400	•	0.750	19.05	0.620	15.75	84
			3.622	92.00	3622	•	0.750	19.05	0.634	16.10	87
7/8	22	087	0.200	5.08	0200	•	0.870	22.10	0.742	18.85	48
			0.236	6.00	0236		0.848	21.54	0.773	19.63	52
			0.250	6.35	0250		0.875	22.25	0.749	19.02	53
			0.284	10.00	0284		0.875	22.23	0.741	18.82	65
			0.300	12.70	0300		0.862	21.89	0.744	18.90	69
			0.330	16.00	0330		0.875	22.23	0.741	18.82	73
			0.367	16.54	0367		0.871	22.12	0.745	18.92	74
			0.787	20.00	0787		0.875	22.23	0.741	18.82	78
			0.845	24.00	0845		0.875	22.23	0.741	18.82	79
			1.000	25.40	1000		0.871	22.12	0.742	18.85	80

Sloped cases have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Kerrote® TFE coated lead screw.
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws.
 *** Back-sine threshold is 90=10%

WDG Nut Series

An economical anti-backlash nut assembly that provides precise positional accuracy and repeatability.

The WDG Series anti-backlash assembly utilizes an exceptionally compact design to provide stiffness and balanced accuracy for precise positioning. The unique wedge design locks the nut at the correct preload without excessive drag.

Shorter than other self-compensating nuts with similar performance, the WDG nut permits the design of smaller assemblies without sacrificing stroke length. Nut wear or momentary overload is accommodated through the WDG Series compensation mechanism, which maintains positional accuracy in demanding applications.

Highlights

- Compact Size, Moderate Load
- Cost Effective

Grease Compatibility

Coatings	Compatible
Kerrote® TFE Coating	YES
Black Ice® TFE Coating	YES
Grease	NO

Anti-Backlash Life

Without Kerrote® TFE Coating inch / (mm)	With Kerrote® TFE Coating inch / (mm)
100 to 125 million (250 to 315 million)	200 to 250 million (500 to 635 million)

Anti-backlash life is defined as the nut's ability to compensate for wear while maintaining its zero backlash properties. Above life data is based on 25% of the cycle. The longer screw leads generally provide longer life.



WDG Series Nut Assembly

Technical Data

Material		Polyacetal, Lubricant Additive
Tensile Strength		9,700 psi
Coefficient of Expansion		6.0 x 10 ⁻⁵ in/in/F
Coefficient of Friction Polyacetal Nut to Screw		Static = .08 Dynamic = .15 .09 **
Standard Operating Temperature Range		32 - 200° F (0 - 93° C)*

* Use high-lead temperatures may cause significant changes in the nut fit or clearances. Please call the SKF Engineering Team at 603 213 6290 for optimal temperature range materials.
 ** with Kerrote® TFE Coating.

Identifying the WDG Series Nut Part Number Codes when Ordering

WDG	A	K	R	018	0039	XXXX
Prefix	Nut Mounting Style	Lubrication	Thread Direction	Diameter Code	Nominal Thread Lead Code	Unique Identifier
WDG	A = Flange (triangular) P = Flange (triangular with pilot) T = Threaded Micro Series X = Custom	S = Uncoated K = Kerrote® TFE Coating N = Nut only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Refer to lead screw charts for availability)	018 = .188 in (5 mm) 021 = .219 in (5.6 mm) 025 = .253 in (6 mm) 031 = .313 in (8 mm) 037 = .375 in (10 mm) 043 = .438 in (11 mm) 050 = .500 in (13 mm)	0039 = .08 6.0 x 10 ⁻⁵ in/in/F Static = .08 Dynamic = .15 .09 **	XXXX = Proprietary suffix assigned to a specific customer application. The identifier can apply to other a standard or custom part.


NOTE: Dashes must be included in Part Number (H) as shown above. For assistance call our Engineering Team at 603 213 6290.

Dimensional Drawings

WDG Flange Mount and with pilot

	Screw Diam. A	Nut Diam. B	Nut Length C	Flange Diam. D	Flange Thickness E	Mounting Hole Diam. F	Bot. Circle Diam. G	Hub Length H	Hub Diam. J	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
WDGA Flange Mount & WDG* (with pilot)	3/16 (4)	0.625 (16)	1.05 (26.5)	1.125 (28.6)	0.160 (4.1)	0.143 (3.7)	0.875 (22.2)	0.08 (2.04)	0.625 (15.9)	10 (4.5)	4 (.03)
	7/32 (5)	0.625 (16)	1.05 (26.5)	1.125 (28.6)	0.160 (4.1)	0.143 (3.7)	0.875 (22.2)	0.08 (2.04)	0.625 (15.9)	10 (4.5)	4 (.03)
	1/4 (6)	0.625 (16)	1.05 (26.5)	1.125 (28.6)	0.160 (4.1)	0.143 (3.7)	0.875 (22.2)	0.08 (2.04)	0.625 (15.9)	10 (4.5)	4 (.03)
	5/16 (8)	0.750 (19)	1.32 (33.5)	1.5 (38.1)	0.200 (5.08)	0.200 (5.08)	1.125 (28.6)	0.120 (3.05)	0.750 (19.1)	25 (11.3)	5 (.04)
3/8 (10)	0.750 (19)	1.32 (33.5)	1.5 (38.1)	0.200 (5.08)	0.200 (5.08)	1.125 (28.6)	0.120 (3.05)	0.750 (19.1)	25 (11.3)	5 (.04)	
7/16 (11)	1.00 (25.4)	2.078 (52.8)	2.078 (52.8)	1.750 (44.5)	0.250 (6.35)	0.220 (5.6)	1.406 (35.7)	0.255 (6.48)	1.000 (25.4)	75 (34)	9 (.06)
1/2 (13)	1.00 (25.4)	2.078 (52.8)	2.078 (52.8)	1.750 (44.5)	0.250 (6.35)	0.220 (5.6)	1.406 (35.7)	0.255 (6.48)	1.000 (25.4)	75 (34)	9 (.06)


*Metric available as required
 **Other spring pre-loads available
 Metric numbers are for reference only.

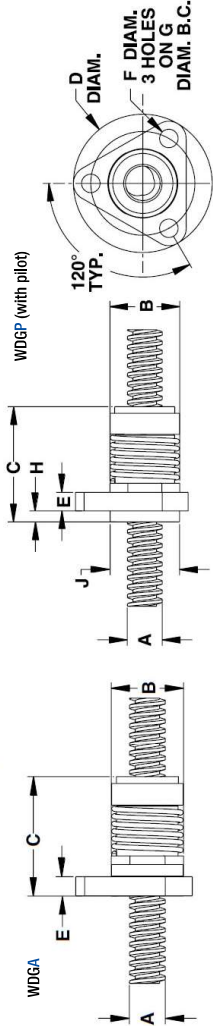

WDG Thread Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Thread M*	Thread N	Thread Length N	Dynamic Load** lbs (kg)	Drag Torque** oz-in (N-m)
3/16 (4)	0.625 (16)	1.05 (26.5)	9/16 - 18	0.240 (6.1)	0.240 (6.1)	10 (4.5)	4 (.03)
7/32 (5)	0.625 (16)	1.05 (26.5)	9/16 - 18	0.240 (6.1)	0.240 (6.1)	10 (4.5)	4 (.03)
1/4 (6)	0.625 (16)	1.05 (26.5)	9/16 - 18	0.240 (6.1)	0.240 (6.1)	10 (4.5)	4 (.03)
5/16 (8)	0.750 (19)	1.32 (33.5)	5/8 - 18	0.320 (8.1)	0.320 (8.1)	25 (11.3)	5 (.04)
3/8 (10)	0.750 (19)	1.32 (33.5)	5/8 - 18	0.320 (8.1)	0.320 (8.1)	25 (11.3)	5 (.04)
7/16 (11)	1.00 (25.4)	2.078 (52.8)	15/16 - 16	0.500 (12.7)	0.500 (12.7)	75 (34)	9 (.06)
1/2 (13)	1.00 (25.4)	2.078 (52.8)	15/16 - 16	0.500 (12.7)	0.500 (12.7)	75 (34)	9 (.06)

*Metric available as required
 **Other spring pre-loads available
 Metric numbers are for reference only.

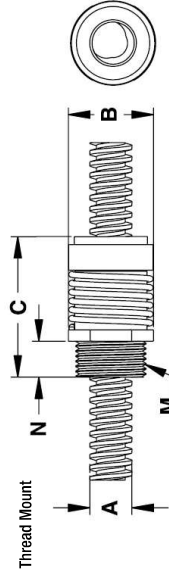

Dimensional Tolerances	
Inches	Metric (mm)
.X ± .02	< L4 ± 0.1
.XX ± .010	4 < L ≤ 16 ± 0.15
.XXX ± .005	16 < L ≤ 63 ± 0.2
	63 < L ≤ 250 ± 0.3

Lead Screw Compatibility: WDG Series

Diameter inches	Diameter Code	Lead inches	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Root Diameter (for reference) inches	Efficiency %*
3/16	018	0.020	0020		0.188	0.163	30
		0.025	0025		0.188	0.150	39
		0.039	0039		0.188	0.144	47
		0.050	0050		0.188	0.124	58
		0.100	0100		0.188	0.136	69
		0.1675	0168		0.188	0.167	78
		0.200	0200		0.188	0.124	82
		0.275	0275		0.188	0.161	84
		0.400	0400		0.188	0.124	84
		0.427	0427		0.188	0.162	85
		0.500	0500		0.188	0.142	86
		0.624	0624		0.188	0.181	86
7/32	021	0.024	0024		0.218	0.191	31
		0.03125	0031		0.204	0.180	39
		0.048	0048		0.216	0.156	50
		0.050	0050		0.200	0.135	52
		0.0625	0063		0.218	0.142	60
		0.096	0096		0.218	0.156	66
		0.192	0192		0.218	0.154	78
		0.250	0250		0.204	0.140	81
		0.384	0384		0.218	0.159	86
		0.624	0624		0.250	0.218	88
		0.925	0925		0.250	0.214	90
		1.27	1270		0.250	0.208	94
1/4	025	0.039	0039		0.250	0.190	40
		0.048	0048		0.250	0.180	45
		0.050	0050		0.250	0.191	46
		0.059	0059		0.250	0.172	52
		0.0625	0063		0.250	0.170	52
		0.079	0079		0.250	0.170	59
		0.096	0096		0.250	0.190	61
		0.100	0100		0.250	0.180	62
		0.118	0118		0.250	0.175	68
		0.125	0125		0.250	0.180	67
		0.197	0197		0.250	0.172	72
		0.200	0200		0.250	0.170	65
0.250	0250		0.250	0.168	79		
0.3725	0373		0.250	0.184	81		
0.333	0333		0.250	0.170	82		
0.354	0354		0.250	0.170	78		
0.400	0400		0.250	0.170	84		
0.500	0500		0.250	0.189	85		
0.750	0750		0.250	0.170	86		
1.000	1000		0.250	0.170	84		

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
 *Lead efficiencies are theoretical values based on Ametek® TFE coated lead screw.
 **Other spring pre-loads available
 ***Back-slash threshold is 10-15%.

Lead Screw Compatibility: WDG Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*	
5/16	8	031	0.039	1.00	0039		0.315	8.00	0.291	6.63	34	
			0.067	1.44	0067		0.315	8.00	0.243	6.17	6.17	43
			0.0741	1.88	0074		0.312	7.92	0.271	5.36		51
			0.111	2.82	0111		0.312	7.92	0.232	5.89	6.0	60
			0.167	4.24	0167		0.312	7.92	0.211	5.36	6.9	69
			0.250	6.35	0250		0.312	7.92	0.234	5.94	7.6	76
			0.500	12.70	0500		0.312	7.92	0.232	5.89	8.3	83
			0.800	20.32	0800		0.306	7.77	0.243	6.17	8.6	86
			0.925	0.64	0925		0.375	9.53	0.327	8.56	21	21
			0.039	1.00	0039		0.394	10.01	0.340	8.89	28	28
			0.04167	1.06	0416		0.375	9.53	0.320	8.13	34	34
			0.050	1.27	0050		0.375	9.53	0.301	7.65	36	36
			0.055	1.40	0055		0.375	9.53	0.303	7.70	38	38
			0.059	1.50	0059		0.389	9.88	0.313	7.95	38	38
			0.0625	1.59	0063		0.388	9.86	0.295	7.49	41	41
			0.069	1.73	0068		0.388	9.86	0.285	7.49	42	42
0.079	2.00	0079		0.375	9.53	0.294	6.71	47	47			
0.0833	2.12	0083		0.375	9.53	0.293	7.44	48	48			
0.100	2.54	0100		0.375	9.53	0.286	6.76	53	53			
0.125	3.18	0125		0.375	9.53	0.285	7.49	59	59			
0.157	4.00	0157		0.375	9.53	0.274	6.86	65	65			
0.197	5.00	0197		0.371	9.42	0.281	6.63	61	61			
0.200	5.08	0200		0.375	9.53	0.286	6.76	69	69			
0.250	6.35	0250		0.375	9.53	0.288	6.81	70	70			
0.300	7.62	0300		0.375	9.53	0.295	6.48	76	76			
0.333	8.46	0333		0.375	9.53	0.245	6.22	78	78			
0.363	9.22	0363		0.375	9.53	0.280	6.60	79	79			
0.375	9.53	0375		0.375	9.53	0.295	6.73	79	79			
0.394	10.00	0394		0.375	9.53	0.280	6.60	79	79			
0.400	10.16	0400		0.375	9.53	0.293	7.44	79	79			
0.472	12.00	0472		0.388	9.86	0.287	7.29	82	82			
0.500	12.70	0500		0.388	9.86	0.295	6.73	81	81			
0.667	16.94	0667		0.375	9.53	0.273	6.83	83	83			
0.667	16.94	0667		0.388	9.86	0.273	6.83	84	84			
0.884	25.00	0884		0.375	9.53	0.282	6.65	84	84			
1.000	25.40	1000		0.383	9.73	0.294	6.45	84	84			
1.200	30.48	1200		0.383	9.73	0.294	6.45	84	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84	84			
1.500	38.10	1500		0.375	9.53	0.284	6.71	83	83			

* Listed efficiencies are theoretical values based on Keritec® TFC coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

Starter sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: WDG Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*	
7/16	11	043	0.050	1.27	0050		0.437	11.10	0.362	9.19	30	
			0.0625	1.59	0063		0.456	11.07	0.358	9.09	38	38
			0.079	2.00	0079		0.472	11.89	0.374	9.50	42	42
			0.111	2.82	0111		0.497	11.10	0.327	8.31	52	52
			0.118	3.00	0118		0.438	11.13	0.363	9.22	52	52
			0.125	3.18	0125		0.438	11.13	0.357	9.07	54	54
			0.197	5.00	0197		0.438	11.13	0.315	8.00	65	65
			0.236	6.00	0236		0.433	11.00	0.313	7.95	70	70
			0.250	6.35	0250		0.442	11.23	0.325	8.26	70	70
			0.307	7.80	0307		0.445	11.30	0.349	8.71	73	73
			0.325	8.26	0325		0.444	11.28	0.342	8.69	74	74
			0.384	10.00	0384		0.446	11.33	0.331	8.41	78	78
			0.472	12.00	0472		0.438	11.13	0.318	8.08	80	80
			0.500	12.70	0500		0.452	11.48	0.327	8.31	80	80
			0.615	15.62	0615		0.475	12.07	0.376	9.55	82	82
			0.650	1.27	0650		0.485	12.57	0.433	11.00	29	29
0.079	2.00	0079		0.473	12.01	0.335	9.02	41	41			
0.088	2.50	0088		0.500	12.70	0.383	9.73	46	46			
0.100	2.54	0100		0.490	12.45	0.364	9.25	46	46			
0.125	3.18	0125		0.500	12.70	0.374	9.50	51	51			
0.157	4.00	0157		0.500	12.70	0.384	9.75	58	58			
0.160	4.06	0160		0.500	12.70	0.388	9.86	67	67			
0.197	5.00	0197		0.500	12.70	0.384	9.75	58	58			
0.200	5.08	0200		0.500	12.70	0.386	9.30	63	63			
0.250	6.35	0250		0.492	12.50	0.366	9.30	63	63			
0.333	8.46	0333		0.500	12.70	0.392	9.70	67	67			
0.384	10.00	0384		0.497	12.62	0.362	9.19	73	73			
0.400	10.16	0400		0.497	12.62	0.362	9.19	76	76			
0.497	12.62	0497		0.497	12.62	0.362	9.19	76	76			
0.500	12.70	0500		0.488	12.40	0.392	9.84	79	79			
0.630	16.00	0630		0.500	12.70	0.374	9.50	80	80			
0.750	19.05	0750		0.525	13.34	0.399	10.13	83	83			
0.800	20.32	0800		0.500	12.70	0.370	9.40	83	83			
0.884	25.00	0884		0.500	12.70	0.369	9.37	84	84			
1.000	25.40	1000		0.490	12.45	0.372	9.45	84	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85	85			
2.000	50.80	2000		0.488	12.40	0.378	9.60	87	87			

* Listed efficiencies are theoretical values based on Keritec® TFC coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

Starter sizes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

ZBA Nut Series

Developed specifically for those applications that require very smooth and consistent motion, the patented ZBA Series offers a cost effective anti-backlash assembly for applications requiring precise positional accuracy and repeatability. The ZBA has been developed specifically for those applications that require very smooth and consistent motion such as printing, scanning, and coordinate measurement systems. An added benefit of the ZBA design is the ability to manually adjust the drag torque setting to match the specific requirements of the application. This drag torque can also be set at the factory to meet individual customer specifications. The inherent damping qualities of the ZBA design make it ideally suited for applications requiring noise or vibration control. The standard ZBA unit utilizes a self-lubricating polyacetal nut radially preloaded on a 303 stainless steel screw. End machining to customer specifications and KerKote® TFE screw coating are optional.

- **Highlights**
 - Adjustable Drag Torque
 - Cost Effective
 - Smooth and Consistent Motion

- **Grease Compatibility**

Coatings	Compatible
KerKote TFE Coating	YES
Black Ice TFE Coating	YES
Grease	YES

- **Dimensional Tolerances**

Inches	Metric (mm)
.X ± .02	< L4 ± 0.1
.XX ± .010	4 < L ≤ 16 ± 0.15
.XXX ± .005	16 < L ≤ 63 ± 0.2
	63 < L ≤ 250 ± 0.3

Anti-backlash life is defined as the nut's ability to compensate for wear while maintaining its zero backlash properties. Above life data is based on 25% of the dynamic load rating. Life will vary with loading, operating environment, and duty cycle. The larger screw leads generally provide longer life.



ZBA Series Nut Assembly

- **Technical Data**

Material	Polycrystal, Lubricant Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F
Coefficient of Friction Nut to Screw	Static = .08 Dynamic = .15 Dynamic = .15 Dynamic = .15 Dynamic = .15
Standard Operating Temperature Range	32 - 200° F* (0 - 89° C)*

*Very high or low temperatures may cause significant changes in the nut fit or drag torque. Please call the High Engineering Team at 603.213.6290 for optional temperature range materials.
*With KerKote TFE Coating.

- **Anti-Backlash Life**

Without KerKote® TFE Coating inch / (cm)	With KerKote® TFE Coating inch / (cm)
5 to 10 million (12 to 25 million)	15 to 40 million (38 to 100 million)

- **Identifying the ZBA Micro Series Nut Part Number Codes when Ordering**

ZBA Prefix	A Nut Mounting Style	K Lubrication	R Thread Direction	062 Diameter Code	0100 Nominal Thread Lead Code	XXXX Unique Identifier
ZBA	A = Hanged (Triangular) T = Threaded Micro Series X = Custom	S = Uncoated K = KerKote® TFE Coating G = Grease N = Nut only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Refer to lead screw charts for availability)	025 = .250 in (6 mm) 031 = .313 in (8 mm) 037 = .375 in (10 mm) 043 = .438 in (11 mm) 050 = .500 in (13 mm) 062 = .625 in (16 mm) 075 = .750 in (19 mm) 087 = .875 in (22 mm) 093 = .938 in (24 mm)	(Refer to LEAD CODE SPECIFICATIONS charts, pages 3 to 6)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.


NOTE: Details must be included in Part Number P- as shown above. For assistance call our Engineering Team at 603.213.6290.

- **Dimensional Drawings**

ZBA Flange Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Boft Circle Diam. G inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
1/4 (6)	.50 (12.7)	1.0 (26)	1.0 (25.4)	.18 (4.6)	.140 (3.6)	.750 (19.1)	5 (2.3)	.25 - 3 (.002 - .021)
5/16 (8)	.70 (17.8)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	10 (5)	1 - 5 (.007 - .03)
3/8 (10)	.70 (17.8)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	10 (5)	1 - 5 (.007 - .03)
7/16 (11)	.80 (20.3)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	15 (7)	2 - 6 (.014 - .04)
1/2 (13)	.89 (22.6)	2.0 (51)	1.62 (41.2)	.26 (6.6)	.200 (5.08)	1.125 (28.6)	25 (11)	3 - 7 (.02 - .05)
5/8 (16)	1.06 (26.9)	2.0 (51)	1.75 (44.5)	.26 (6.6)	.200 (5.08)	1.375 (34.9)	35 (16)	4 - 8 (.028 - .055)
3/4 (19)	1.70 (43.2)	2.88 (73.2)	2.63 (66.8)	0.38 (9.6)	0.218 (5.5)	2.25 (57.2)	55 (25)	5 - 9 (.03 - .064)
7/8 (22)	1.70 (43.2)	2.88 (73.2)	2.63 (66.8)	0.38 (9.6)	0.218 (5.5)	2.25 (57.2)	55 (25)	5 - 9 (.03 - .064)
15/16 (24)	1.70 (43.2)	2.88 (73.2)	2.63 (66.8)	0.38 (9.6)	0.218 (5.5)	2.25 (57.2)	55 (25)	5 - 9 (.03 - .064)


*Metric available as required
**Other spring pre-heats available
Metric numbers are for reference only.

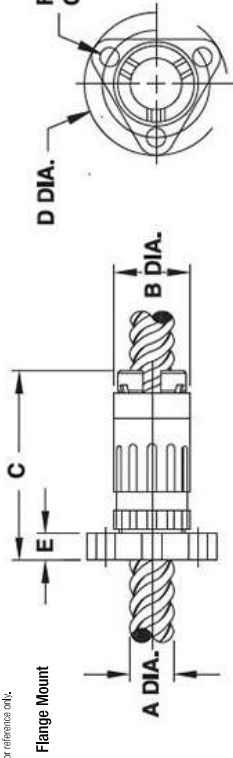

ZBX Thread Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Thread M* inch (mm)	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque** oz-in (N-m)
1/4 (6)	.50 (12.7)	1.3 (33)	.80 (20.3)	.22 (5.6)	5/8 - 18	.16 (4.1)	5 (2.3)	.25 - 3 (.002 - .021)
5/16 (8)	.70 (17.8)	2.2 (56)	1.00 (25.4)	.17 (4.3)	5/8 - 18	.36 (9.7)	10 (5)	1 - 5 (.007 - .03)
3/8 (10)	.70 (17.8)	2.2 (56)	1.00 (25.4)	.17 (4.3)	5/8 - 18	.36 (9.7)	10 (5)	1 - 5 (.007 - .03)
7/16 (11)	.80 (20.3)	2.3 (59)	1.00 (25.4)	.12 (3.1)	15/16 - 16	.36 (9.7)	15 (7)	2 - 6 (.014 - .04)
1/2 (13)	.89 (22.6)	2.3 (59)	1.02 (25.9)	.12 (3.1)	15/16 - 16	.36 (9.7)	25 (11)	3 - 7 (.02 - .05)
5/8 (16)	1.06 (26.9)	2.4 (61)	1.06 (26.9)	.15 (3.8)	15/16 - 16	.50 (12.7)	35 (16)	4 - 8 (.028 - .055)

*Metric available as required
**Other spring pre-heats available
Metric numbers are for reference only.

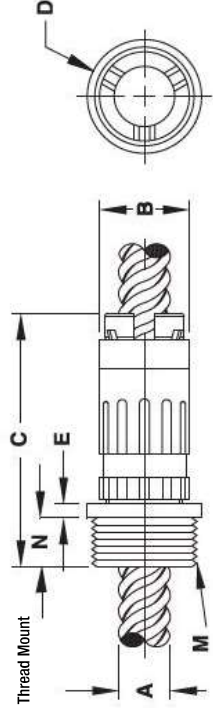

Lead Screw Compatibility: ZBA Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/4	6	025	0.024	0.61	0024		0.250	6.35	0.218	5.54	28
			0.025	0.64	0025		0.250	6.35	0.214	5.44	30
			0.03125	0.79	0031		0.250	6.35	0.208	5.28	34
			0.039	1.00	0039		0.250	6.35	0.190	4.83	40
			0.048	1.22	0048		0.250	6.35	0.190	4.83	45
			0.050	1.27	0050	•	0.250	6.35	0.191	4.85	46
			0.059	1.50	0059		0.250	6.35	0.172	4.37	52
			0.0625	1.59	0063		0.250	6.35	0.170	4.32	52
			0.079	2.00	0079		0.250	6.35	0.170	4.32	59
			0.096	2.44	0096		0.250	6.35	0.190	4.83	61
			0.100	2.54	0100		0.250	6.35	0.190	4.83	62
			0.118	3.00	0118		0.250	6.35	0.175	4.45	68
0.125	3.18	0125		0.250	6.35	0.190	4.83	67			
0.157	5.00	0157		0.250	6.35	0.172	4.37	72			
0.200	5.08	0200		0.250	6.35	0.170	4.32	65			
0.250	6.35	0250		0.250	6.35	0.168	4.27	79			
0.3125	7.94	0313		0.250	6.35	0.194	4.67	81			
0.333	8.46	0333		0.250	6.35	0.170	4.32	82			
0.400	10.16	0400		0.250	6.35	0.170	4.32	78			
0.500	12.70	0500		0.250	6.35	0.169	4.29	85			
0.750	19.05	0750		0.250	6.35	0.170	4.32	86			
1.000	25.40	1000		0.250	6.35	0.170	4.32	84			
0.089	1.00	0039		0.315	8.00	0.261	6.63	34			
0.067	1.44	0067		0.315	8.00	0.243	6.17	43			
0.0741	1.88	0074		0.312	7.92	0.211	5.36	51			
0.111	2.82	0111		0.312	7.92	0.232	5.89	60			
0.167	4.24	0167		0.312	7.92	0.211	5.36	69			
0.250	6.35	0250		0.312	7.92	0.234	5.94	76			
0.500	12.70	0500		0.312	7.92	0.232	5.89	83			
0.800	20.32	0800		0.306	7.77	0.243	6.17	85			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Lead efficiencies are theoretical values based on Kerk® TFE coated lead screw.
 ** Lead efficiencies for Micro screws are theoretical values based on non-coated lead screws.
 *** Back-drive threshold is 90-10%.

Lead Screw Compatibility: ZBA Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/8	10	037	0.025	0.64	0025		0.375	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.53	0.320	8.13	34
			0.050	1.27	0050	•	0.375	9.53	0.301	7.65	36
			0.065	1.40	0065		0.375	9.53	0.303	7.70	38
			0.069	1.50	0069	•	0.389	9.88	0.313	7.95	38
			0.0825	1.59	0083		0.388	9.86	0.295	7.49	41
			0.088	1.73	0088		0.388	9.86	0.295	7.49	42
			0.079	2.00	0079		0.375	9.53	0.284	6.71	47
			0.0833	2.12	0083		0.375	9.53	0.293	7.44	48
			0.100	2.54	0100		0.375	9.53	0.286	6.76	53
			0.125	3.18	0125		0.375	9.53	0.295	7.49	59
0.157	4.00	0157		0.375	9.53	0.274	6.96	65			
0.167	4.23	0167		0.371	9.42	0.291	6.63	61			
0.197	5.00	0197		0.375	9.53	0.286	6.76	69			
0.200	5.08	0200		0.375	9.53	0.286	6.76	69			
0.250	6.35	0250		0.375	9.53	0.288	6.81	70			
0.300	7.62	0300		0.375	9.53	0.295	6.46	76			
0.333	8.46	0333		0.375	9.53	0.295	6.22	78			
0.363	9.22	0363		0.375	9.53	0.290	6.60	79			
0.375	9.53	0375		0.375	9.53	0.285	6.73	79			
0.384	10.00	0384		0.375	9.53	0.280	6.60	79			
0.400	10.16	0400		0.375	9.53	0.283	7.44	79			
0.472	12.00	0472		0.388	9.86	0.297	7.29	82			
0.500	12.70	0500		0.388	9.86	0.285	6.73	81			
0.667	16.94	0667		0.375	9.53	0.273	6.93	83			
0.667	19.05	0750		0.388	9.86	0.273	6.83	84			
0.884	25.00	0884		0.375	9.53	0.292	6.65	84			
1.000	25.40	1000		0.383	9.73	0.294	6.45	84			
1.200	30.48	1200		0.383	9.73	0.294	6.45	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.284	6.71	83			
0.050	1.27	0050		0.437	11.10	0.382	9.19	30			
0.0625	1.59	0063		0.436	11.07	0.358	9.09	38			
0.079	2.00	0079		0.472	11.99	0.374	9.50	42			
0.111	2.82	0111		0.437	11.10	0.327	8.31	52			
0.118	3.00	0118		0.438	11.13	0.353	9.22	52			
0.125	3.18	0125		0.438	11.13	0.357	9.07	54			
0.197	5.00	0197		0.458	11.13	0.315	8.00	65			
0.236	6.00	0236		0.433	11.00	0.313	7.95	70			
0.250	6.35	0250		0.442	11.23	0.325	8.26	70			
0.307	7.80	0307		0.445	11.30	0.343	8.71	73			
0.325	8.26	0325		0.441	11.28	0.342	8.69	74			
0.384	10.00	0384		0.446	11.33	0.331	8.41	78			
0.472	12.00	0472		0.458	11.13	0.318	8.08	80			
0.500	12.70	0500		0.452	11.48	0.327	8.31	80			
0.615	15.62	0615		0.475	12.07	0.376	9.55	82			

Lead Screw Compatibility: ZBA Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/2	13	060	0.650	1.27	0650		0.496	12.57	0.433	11.00	29
			0.279	2.00	0079		0.473	12.01	0.355	9.02	41
			0.689	2.50	0089		0.500	12.70	0.383	9.73	46
			0.100	2.54	0100	•	0.490	12.45	0.364	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.394	9.75	58
			0.160	4.06	0160		0.500	12.70	0.388	9.86	67
			0.1867	4.23	0167		0.500	12.70	0.394	9.75	58
			0.197	5.00	0197		0.500	12.70	0.385	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.366	9.30	63
			0.250	6.35	0250		0.500	12.70	0.382	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.362	9.19	73
			0.364	10.00	0364		0.497	12.62	0.362	9.19	76
			0.400	10.16	0400		0.497	12.62	0.364	9.25	76
			0.500	12.70	0500		0.488	12.40	0.352	8.94	79
0.630	16.00	0630		0.500	12.70	0.374	9.50	80			
0.750	19.05	0750		0.625	15.88	0.389	10.13	83			
0.900	20.32	0900		0.500	12.70	0.370	9.40	83			
0.984	25.00	0984		0.500	12.70	0.369	9.37	84			
1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85			
2.000	50.80	2000		0.488	12.40	0.378	9.60	87			
0.100	2.54	0100		0.415	15.62	0.488	12.65	40			
0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45			
0.200	5.08	0200		0.625	15.88	0.485	12.57	53			
0.250	6.35	0250		0.625	15.88	0.469	11.91	63			
0.315	8.00	0315		0.627	15.83	0.493	12.52	68			
0.410	10.41	0410	•	0.625	15.88	0.481	12.22	72			
0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76			
0.630	16.00	0630		0.625	15.88	0.481	12.47	78			
1.000	25.40	1000		0.625	15.88	0.481	12.22	83			
1.500	38.10	1500	•	0.625	15.88	0.489	12.67	85			
1.575	40.00	1575	•	0.625	15.88	0.489	12.67	86			
2.000	50.80	2000		0.625	15.88	0.489	12.67	86			

Shaded areas have been translated from their designed inch to mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

Lead Screw Compatibility: ZBA Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/4	19	075	0.625	1.59	0663		0.750	19.05	0.671	17.04	25
			0.698	2.50	0698		0.742	18.85	0.656	15.90	35
			0.100	2.54	0100	•	0.746	18.85	0.654	15.85	35
			0.1667	4.23	0167		0.727	18.47	0.645	16.38	47
			0.197	5.00	0197		0.745	18.82	0.654	15.85	51
			0.200	5.08	0200		0.741	18.82	0.652	16.05	52
			0.250	6.35	0250		0.731	18.57	0.659	16.23	57
			0.276	7.00	0276		0.750	19.05	0.654	15.85	59
			0.333	8.46	0333		0.750	19.05	0.654	15.85	64
			0.364	10.00	0364		0.745	18.82	0.619	15.72	67
			0.500	12.70	0500		0.744	18.80	0.624	15.85	73
			0.551	14.00	0551		0.750	19.05	0.624	15.85	73
			0.591	15.00	0591		0.749	19.02	0.623	15.82	74
			0.709	18.00	0709		0.760	19.81	0.650	16.51	77
			0.748	19.00	0748		0.672	17.07	0.547	13.89	80
0.800	20.32	0800		0.760	19.81	0.648	16.46	78			
0.900	22.92	0900		0.750	19.05	0.618	15.70	79			
0.945	24.00	0945		0.734	18.64	0.633	16.08	80			
1.000	25.40	1000	•	0.743	18.87	0.619	15.72	81			
1.500	38.10	1500		0.712	18.08	0.590	14.99	84			
1.989	50.00	1989		0.751	19.08	0.620	15.75	84			
2.000	50.80	2000	•	0.742	18.85	0.611	15.52	84			
2.400	60.85	2400	•	0.750	19.05	0.620	15.75	84			
3.622	92.00	3622	•	0.750	19.05	0.634	16.10	87			
0.200	5.08	0200	•	0.870	22.10	0.742	18.85	48			
0.238	6.00	0238		0.848	21.54	0.773	19.63	52			
0.250	6.35	0250		0.875	22.23	0.749	19.02	53			
0.384	10.00	0384		0.875	22.23	0.741	18.82	65			
0.500	12.70	0500		0.862	21.89	0.744	18.80	69			
0.630	16.00	0630		0.875	22.23	0.741	18.82	73			
0.667	16.94	0667		0.871	22.12	0.745	18.82	74			
0.767	20.00	0767		0.875	22.23	0.741	18.82	78			
0.945	24.00	0945		0.875	22.23	0.741	18.82	79			
1.000	25.40	1000		0.871	22.12	0.742	18.85	80			
0.650	1.27	0650	U10M	0.888	23.83	0.874	22.20	17			
2.000	50.80	2000		0.927	23.55	0.815	20.70	85			
3.000	76.20	3000	•	0.939	23.85	0.803	20.40	86			

Shaded areas have been translated from their designed inch to mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

ZBX Nut Series

An economical anti-backlash nut assembly that provides precise positional accuracy and repeatability. The patented ZBX Series anti-backlash assembly offers an effective linear actuator for design operations requiring precise positional accuracy and repeatability, with minimum cost. The standard ZBX unit utilizes a patented self-lubricating polyacetal nut radially preloaded on a 303 stainless steel screw. The ZBX assembly, through its unique transfer of loads, offers exceptional torque consistency and repeatability when traversing in either direction. The inherent damping qualities of the ZBX design make it ideally suited for vertical applications requiring noise or vibration control. End machining to customer specifications and KerKote® TFE screw coating are optional, as are designs for special operating configurations or environments.



ZBX Series Nut Assembly

ZBM Micro Nut Series

Made from self-lubricating acetal and KerKote® High Performance Composite Polymers. This remarkable product line is an enabling technology, opening up a whole new range of designs. Developed in response to growing demands in many markets, Haydon Kerk Motion Solutions has offered micro screws on a custom basis for more than 10 years. Now, available as a standard product, customers can get quicker, cost effective deliveries. The Micro Series ZBM anti-backlash and Micro Series lead screws are available as standalone components or integrated into the high performance Haydon linear actuators. The Micro Series allows the miniaturization of products, reduced power consumption, and weight reduction without sacrificing performance or reliability.

■ Highlights

- Economical anti-backlash nut assembly
- Light Loads
- Ultra-Smooth Motion
- Precise positional accuracy and repeatability

■ ZBX Grease Compatibility

Coatings	Compatible
KerKote® TFE Coating	YES
Black Ice® TFE Coating	YES
Grease	YES

■ ZBX Anti-Backlash Life

Without KerKote® TFE Coating	With KerKote® TFE Coating
inch / (cm)	inch / (cm)
40 to 60 million (100 to 150 million)	150 to 200 million (380 to 500 million)

Anti-backlash life is defined as the nut's ability to compensate for wear with drag torque. Please call the High Engineering Team at 803.213.6290, for optional temperature range materials.
*with KerKote® TFE Coating.

■ ZBX Technical Data

Material	Polyacetal with Lubricant Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F
Coefficient of Friction Polyacetal Nut to Screw	Static = .08 Dynamic = .15 .09 **
Standard Operating Temperature Range	32-200° F* (0-93° C)*

*Very high or low temperatures may cause significant changes in the nut fit or drag torque. Please call the High Engineering Team at 803.213.6290, for optional temperature range materials.
**with KerKote® TFE Coating.

■ Identifying the ZBX and ZBM Micro Series Nut Part Number Codes when Ordering

ZBX	T	S	R	D25	0050	XXXX
Prefix	Nut Mounting Style	Lubrication	Thread Direction	Diameter Code	Nominal Thread Lead Code	Unique Identifier
ZB	A = Flanged (triangular)	S = Uncoated	R = Right hand	00R = .078 in (2 mm)	(Refer to LEAD CODE Specifications charts, pages 4 to 6)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.
ZBM = Micro Series	T = Threaded R = Rectangular X = Custom	K = KerKote® TFE Coating G = Grease N = Nut only B = Black Ice® TFE Coating	L = Left hand (Refer to lead screw charts for availability)	02S = .250 in (6 mm) 031 = .313 in (8 mm) 037 = .375 in (10 mm) 043 = .438 in (11 mm) 050 = .500 in (13 mm) 062 = .625 in (16 mm) *Micro Series only		

NOTE: Diameters must be included in Part Number (H) as shown above. For assistance call our Engineering Team at 803.213.6290.


■ Dimensional Drawings

ZBX Flange Mount

	Screw Diam. A	Nut Diam. B	Nut Length C	Flange Diam. D	Flange Thickness E	Mounting Hole Diam. F	Both Circle Diam. G	Dynamic Load** lbs (kg)	Drag Torque** oz-in (N-m)
ZBXA Flange Mount	1/4 (6)	.50 (12.7)	1.0 (25)	1.0 (25.4)	.18 (4.6)	.140 (3.6)	.750 (19.1)	5 (2.3)	.25 - 3 (.002 - .021)
	5/16 (8)	.70 (17.8)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	10 (5)	1 - 5 (.007 - .03)
	3/8 (10)	.70 (17.8)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	10 (5)	1 - 5 (.007 - .03)
	7/16 (11)	.80 (20.3)	1.9 (48)	1.5 (38.1)	.18 (4.6)	.200 (5.08)	1.125 (28.6)	15 (7)	2 - 6 (.014 - .04)
	1/2 (13)	.89 (22.6)	2.0 (51)	1.62 (41.2)	.26 (6.6)	.200 (5.08)	1.125 (28.6)	25 (11)	3 - 7 (.02 - .05)
	5/8 (16)	1.06 (26.9)	2.0 (51)	1.75 (44.5)	.26 (6.6)	.200 (5.08)	1.375 (34.9)	35 (16)	4 - 8 (.028 - .055)

**Metric available, as required
**Order springs pre-loads available
Metric numbers are for reference only.

Flange Mount

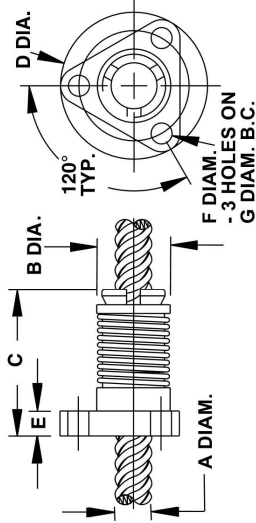


ZBX Thread Mount

	Screw Diam. A	Nut Diam. B	Nut Length C	Flange Diam. D	Flange Thickness E	Thread M * inch (mm)	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque** oz-in (N-m)
ZBXT Thread Mount	1/4 (6)	.50 (12.7)	1.3 (33)	.80 (20.3)	.22 (5.6)	5/8 - 18	.16 (4.1)	5 (2.3)	.25 - 3 (.002 - .021)
	5/16 (8)	.70 (17.8)	2.2 (56)	1.00 (25.4)	.17 (4.3)	5/8 - 18	.38 (9.7)	10 (5)	1 - 5 (.007 - .03)
	3/8 (10)	.70 (17.8)	2.2 (56)	1.00 (25.4)	.17 (4.3)	5/8 - 18	.38 (9.7)	10 (5)	1 - 5 (.007 - .03)
	7/16 (11)	.80 (20.3)	2.3 (59)	1.00 (25.4)	.12 (3.1)	15/16 - 16	.38 (9.7)	15 (7)	2 - 6 (.014 - .04)
	1/2 (13)	.89 (22.6)	2.3 (59)	1.02 (25.9)	.12 (3.1)	15/16 - 16	.38 (9.7)	25 (11)	3 - 7 (.02 - .05)
	5/8 (16)	1.06 (26.9)	2.4 (61)	1.06 (26.9)	.15 (3.8)	15/16 - 16	.50 (12.7)	35 (16)	4 - 8 (.028 - .055)

**Metric available, as required
**Order springs pre-loads available
Metric numbers are for reference only.

Thread Mount

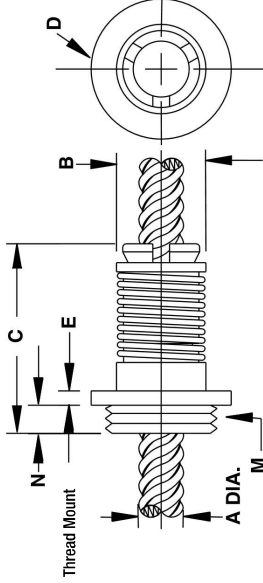

ZBX Dimensional Tolerances

Inches	Metric (mm)
.X	< L4 ± 0.1
.XX	4 < L ≤ 16 ± 0.15
.XXX	16 < L ≤ 63 ± 0.2
	63 < L ≤ 250 ± 0.3

ZBM Micro Series Rectangular Anti-Backlash Nut Style for Micro Lead screws


ZBMW Nut Style	Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D1 inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Thread M* inch (mm)	Thread Length N inch (mm)	Dynamic Load** lbs (kg)	Drag Torque** oz-in (N-m)
ZBMR Rectangular Flange	5/64 (2)	0.22 (5.5)	0.32 (8)	0.22 (5.5)	0.47 (11.9)	0.08 (2.0)	0.07 (1.8)	0.35 (9.0)	1 (4.5)	0.5 (0.035) Max.

*Metric available as required.
**Under spring pre-loads available.
Metric numbers are for reference only.

Micro Lead Screw Size List	Diameter		Lead		Outside Diameter (for Reference)		Root Diameter (for Reference)		Efficiency %**
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)	
5/64 2	0.020	0.50	0.077	1.96	0.057	1.45	0.057	1.45	36**
	0.039	1.00	0.079	2.01	0.059	1.50	0.059	1.50	52**
	0.079	2.00	0.077	1.96	0.057	1.45	0.057	1.45	66**
	0.079	2.00	0.079	2.01	0.059	1.50	0.059	1.50	66**

* Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws.

** Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

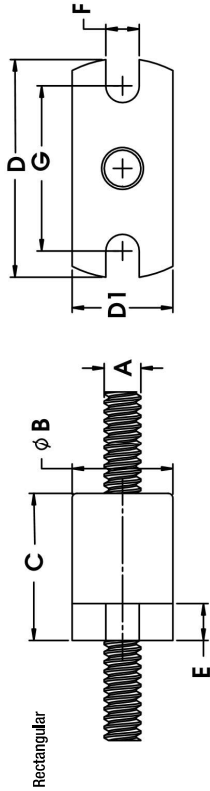

Lead Screw Compatibility: ZBX Series

Diameter inches	Diameter mm	Diameter Code	Lead		LEAD CODE	Left Hand Available	Outside Diameter (for reference)		Root Diameter (for reference)		Efficiency %*
			inches	mm			inches	mm	inches	mm	
5/64	2	008	0.020	0.50	0020		0.077	1.96	0.057	1.45	36**
			0.039	1.00	0039		0.079	2.01	0.059	1.50	52**
			0.079	2.00	0079		0.077	1.96	0.057	1.45	66**
			0.024	0.61	0024		0.250	6.35	0.218	5.54	28
			0.025	0.64	0025		0.250	6.35	0.214	5.44	30
			0.02125	0.79	0021		0.250	6.35	0.208	5.28	34
			0.039	1.00	0039		0.250	6.35	0.190	4.83	40
			0.048	1.22	0048		0.250	6.35	0.190	4.83	45
			0.050	1.27	0050		0.250	6.35	0.191	4.85	46
			0.059	1.50	0059		0.250	6.35	0.172	4.37	52
			0.0625	1.59	0063		0.250	6.35	0.170	4.32	52
			0.079	2.00	0079		0.250	6.35	0.170	4.32	59
1/4	6	025	0.086	2.44	0086		0.250	6.35	0.190	4.83	61
			0.100	2.54	0100		0.250	6.35	0.190	4.83	62
			0.118	3.00	0118		0.250	6.35	0.175	4.45	68
			0.125	3.18	0125		0.250	6.35	0.190	4.83	67
			0.197	5.00	0197		0.250	6.35	0.172	4.37	72
			0.200	5.08	0200		0.250	6.35	0.170	4.32	65
			0.250	6.35	0250		0.250	6.35	0.168	4.27	79
			0.3125	7.94	0313		0.250	6.35	0.184	4.67	81
			0.333	8.46	0333		0.250	6.35	0.170	4.32	82
			0.384	10.00	0384		0.250	6.35	0.170	4.32	78
			0.400	10.16	0400		0.250	6.35	0.170	4.32	84
			0.500	12.70	0500		0.250	6.35	0.169	4.29	85
5/16	8	031	0.750	19.05	0750		0.250	6.35	0.170	4.32	86
			1.000	25.40	1000		0.250	6.35	0.170	4.32	84
			0.039	1.00	0039		0.315	8.00	0.281	6.63	34
			0.057	1.44	0057		0.315	8.00	0.243	6.17	43
			0.0741	1.88	0074		0.312	7.92	0.211	5.36	51
			0.111	2.82	0111		0.312	7.92	0.232	5.89	60
			0.167	4.24	0167		0.312	7.92	0.211	5.36	69
			0.250	6.35	0250		0.312	7.92	0.234	5.94	76
			0.500	12.70	0500		0.312	7.92	0.232	5.89	83
			0.80	20.32	0800		0.306	7.77	0.243	6.17	86

* Listed efficiencies are theoretical values based on Kerk® TFE coated lead screw.
** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws.
*** Back-tire threshold is 80±10%.

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: ZBX Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/8	10	037	0.025	0.64	0025		0.475	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.390	9.89	28
			0.04167	1.06	0042		0.475	9.53	0.330	8.13	34
			0.050	1.27	0050	•	0.375	9.53	0.301	7.65	36
			0.055	1.40	0055		0.375	9.53	0.303	7.70	38
			0.059	1.50	0059	•	0.388	9.86	0.313	7.95	38
			0.0625	1.59	0063	•	0.388	9.86	0.295	7.49	41
			0.068	1.73	0068		0.388	9.86	0.285	7.49	42
			0.079	2.00	0079		0.375	9.53	0.294	6.71	47
			0.083	2.12	0083		0.375	9.53	0.283	7.44	48
			0.100	2.54	0100	•	0.375	9.53	0.266	6.76	53
			0.125	3.18	0125	•	0.375	9.53	0.285	7.49	59
			0.157	4.00	0157		0.375	9.53	0.274	6.96	65
			0.187	4.23	0187		0.371	9.42	0.261	6.63	61
			0.197	5.00	0197		0.375	9.53	0.266	6.76	69
			0.200	5.08	0200	•	0.375	9.53	0.266	6.76	69
0.250	6.35	0250		0.375	9.53	0.268	6.81	70			
0.300	7.62	0300		0.375	9.53	0.285	6.46	76			
0.333	8.46	0333		0.375	9.53	0.245	6.22	78			
0.363	9.22	0363		0.375	9.53	0.280	6.60	79			
0.375	9.53	0375	•	0.375	9.53	0.265	6.73	79			
0.384	10.00	0384		0.375	9.53	0.280	6.60	79			
0.400	10.16	0400		0.375	9.53	0.293	7.44	79			
0.472	12.00	0472		0.388	9.86	0.287	7.29	82			
0.500	12.70	0500		0.388	9.86	0.265	6.73	81			
0.567	16.54	0567	•	0.375	9.53	0.273	6.93	83			
0.667	19.05	0667		0.388	9.86	0.273	6.93	84			
0.864	25.00	0864		0.375	9.53	0.262	6.65	84			
1.000	25.40	1000		0.383	9.73	0.254	6.45	84			
1.200	30.48	1200	•	0.353	9.73	0.294	6.45	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.264	6.71	83			
0.050	1.27	0050		0.437	11.10	0.362	9.19	30			
0.0625	1.59	0063	•	0.456	11.07	0.358	9.09	38			
0.079	2.00	0079		0.472	11.99	0.374	9.50	42			
0.111	2.82	0111		0.437	11.10	0.327	8.31	52			
0.118	3.00	0118		0.438	11.13	0.363	9.22	52			
0.125	3.18	0125		0.438	11.13	0.357	9.07	54			
0.197	5.00	0197		0.438	11.13	0.315	8.00	65			
0.236	6.00	0236		0.433	11.00	0.313	7.95	70			
0.307	7.80	0307		0.442	11.23	0.325	8.26	70			
0.325	8.26	0325		0.444	11.28	0.342	8.69	74			
0.394	10.00	0394		0.446	11.33	0.331	8.41	78			
0.472	12.00	0472		0.438	11.13	0.318	8.08	80			
0.500	12.70	0500		0.452	11.48	0.327	8.31	80			
0.615	15.62	0615		0.475	12.07	0.376	9.55	82			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
 * Lead efficiencies are theoretical values based on Keneco® TFE coated lead screw
 ** Base case threshold is 50-10%
 *** Base case threshold is 50-10%


Lead Screw Compatibility: ZBX Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/2	13	050	0.050	1.27	0050		0.495	12.57	0.433	11.00	29
			0.079	2.00	0079		0.473	12.01	0.355	9.02	41
			0.088	2.50	0088		0.500	12.70	0.363	9.23	46
			0.100	2.54	0100	•	0.490	12.45	0.364	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.384	9.75	58
			0.160	4.06	0160		0.500	12.70	0.398	9.86	67
			0.187	4.23	0187		0.500	12.70	0.384	9.75	58
			0.197	5.00	0197		0.500	12.70	0.365	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.366	9.30	63
			0.250	6.35	0250		0.500	12.70	0.382	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.362	9.19	73
			0.384	10.00	0384		0.497	12.62	0.362	9.19	73
			0.400	10.16	0400		0.497	12.62	0.364	9.25	76
			0.500	12.70	0500		0.488	12.40	0.352	8.94	79
			0.630	16.00	0630		0.500	12.70	0.374	9.50	80
0.750	19.05	0750		0.525	13.34	0.399	10.13	83			
0.800	20.32	0800		0.500	12.70	0.370	9.40	83			
0.864	25.00	0864		0.500	12.70	0.369	9.37	84			
1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85			
2.000	50.80	2000		0.488	12.40	0.378	9.60	87			
0.100	2.54	0100		0.615	15.62	0.498	12.65	40			
0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45			
0.200	5.08	0200		0.625	15.88	0.495	12.57	53			
0.250	6.35	0250		0.625	15.88	0.469	11.91	63			
0.315	8.00	0315		0.627	15.93	0.493	12.52	68			
0.410	10.41	0410	•	0.625	15.88	0.481	12.22	72			
0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76			
0.630	16.00	0630		0.625	15.88	0.491	12.47	78			
1.000	25.40	1000		0.625	15.88	0.481	12.22	83			
1.500	38.10	1500		0.625	15.88	0.489	12.67	85			
1.575	40.00	1575	•	0.625	15.88	0.499	12.67	86			
2.000	50.80	2000	•	0.625	15.88	0.489	12.67	86			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
 * Lead efficiencies are theoretical values based on Keneco® TFE coated lead screw
 ** Base case threshold is 50-10%
 *** Base case threshold is 50-10%

3DP Nut Series

Advanced technology for custom motion control prototype development. The 3DP nut offering is designed for rapid prototyping with additive manufacturing. One of the challenges with the current material offerings in 3D printing is the lack of low wear, low friction materials. For prototyping a lead screw driven assembly, it's critical to simulate the correct tribological performance of the lead nut solution to understand how the axis of motion will perform. By integrating basic anti-rotation, and axial locking features with our high efficiency thread form the 3DP nut allows for simple integration of a premium performance thread system into a 3D printed prototype. This gives engineers and developers a leg up on the competition by being able to quickly test several configurations while leveraging additive manufacturing and top performing lead nut materials. The result is shortened design cycle and rapid product launch to market allowing you to capture more market share with your latest and greatest solution.

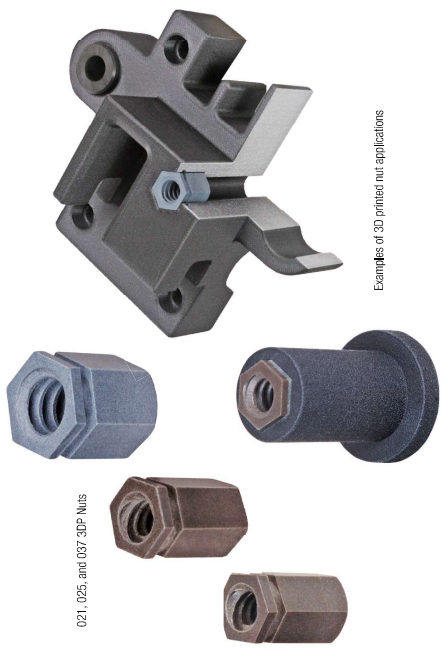

021, 025, and 037 3DP Nuts

Examples of 3D printed nut applications

Free Wheeling and Specialty Nuts

Haydon Kerk offers conventional style free-wheeling nuts — without anti-backlash features — in our standard self-lubricating polyacetal material, as well as a wide range of proprietary engineered thermoplastics to suit a wealth of applications. Catalog configurations provide several mounting options for quick and affordable implementation, and our extensive inhouse molding capabilities allow for highly custom and tightly integrated conformations for our OEM customers.

Grease Compatibility

Coatings	Compatible
KerKote® TFE Coating	YES
Black Ice® TFE Coating	YES
Grease	YES

Technical Data

Material	Polycacetal with Lubricant Additive	KerKite® KN30 High Performance Engineered Polymer
Tensile Strength	9,700 psi	25,000 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F	1.1 X 10 ⁻⁵ in/in/°F
Coefficient of Friction Polyacetal Nut to Screw		Static = .08 Dynamic = .15 .09 **
Standard Operating Temperature Range		32 - 200° F* (0 - 83° C)

* Very high or low temperatures may cause significant changes in the nut fit or drag torque. Please call the High Engineering Team at 603.213.6390 for optional temperature range materials.
** with KerKote® TFE Coating.


Identifying the 3DP Series Nut Part Number Codes when Ordering

3DP Prefix	H Nut Mounting Style	K Lubrication	R Thread Direction	012 Diameter Code	0012 Nominal Thread Lead Code	BZ00 Unique Identifier
3DP	H = Hex	S = Uncoated K = KerKote® TFE Coating G = Grease N = Nut only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Refer to lead screw charts for availability)	012 = .125 in (3.2 mm) 013 = .133 in (3.3 mm) 014 = .141 in (3.6 mm) 016 = .156 in (4 mm) 018 = .188 in (5 mm) 021 = .219 in (5.6 mm) 025 = .250 in (6 mm) 037 = .375 in (10 mm)	(Refer to LENO CODE Specifications charts, pages 3 to 4)	BZ00 = Acetal base with Lubrication matrix KZ00 = KerKite® KN30 high performance polymer BYXX = Standard acetal base hex nut and cut to length lead screw (XX = length in inches) KYYX = KerKite® KN30 base hex nut and cut to length lead screw (XX = length in inches)


NOTE: Dashies must be included in Part Number (s) as shown above. For assistance call our Engineering Team at 603.213.6390.

Dimensional Drawings inch [mm]


3DP Hex Nut-.012 to .021 Series

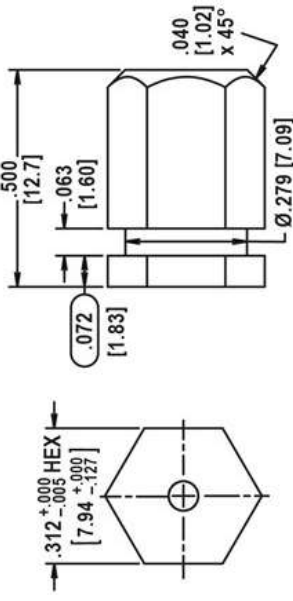

3DP Hex Nut-.025 Series

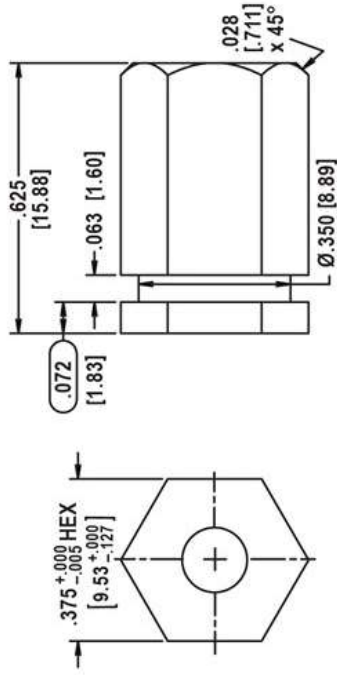

3DP Hex Nut-.037 Series

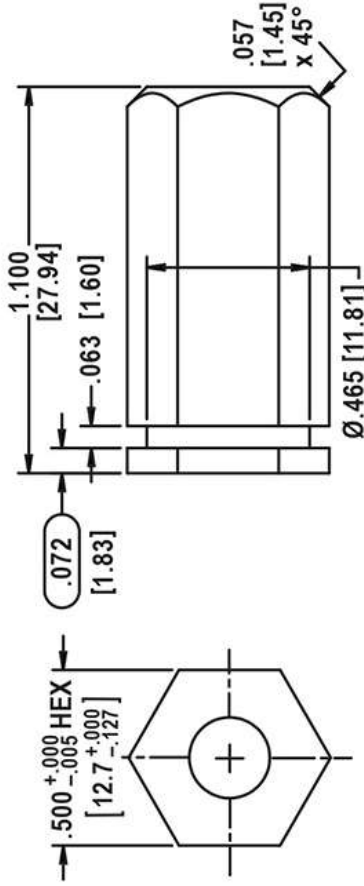

Lead Screw Compatibility: 3DP Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/8	3.2	012	0.024	0.61	0024		0.129	3.28	0.083	2.36	44
			0.039	1.00	0039		0.129	3.28	0.094	2.39	57
			0.048	1.22	0048		0.129	3.28	0.093	2.36	61
			0.075	1.91	0075		0.129	3.28	0.093	2.36	70
			0.086	2.44	0086		0.129	3.28	0.093	2.36	75
			0.125	3.18	0125		0.125	3.18	0.078	1.98	80
.132	3.3	013	0.020	0.50	0020	LH Only	0.132	3.35	0.104	2.64	42
			0.039	1.00	0039		0.132	3.35	0.090	2.03	61
			0.079	2.00	0079		0.132	3.35	0.080	2.03	75
			0.157	4.00	0157		0.132	3.35	0.090	2.03	84
			0.315	8.00	0315		0.132	3.35	0.080	2.03	87
			0.630	16.00	0630		0.140	3.56	0.105	2.67	26
9/64	3.6	014	0.024	0.61	0024		0.140	3.56	0.105	2.67	43
			0.048	1.22	0048		0.140	3.56	0.081	2.06	62
			0.066	2.44	0066		0.140	3.56	0.091	2.06	75
			0.084	3.66	0084		0.140	3.56	0.091	2.06	86
			0.168	7.32	0168		0.156	3.96	0.116	2.95	45
			0.336	14.64	0336		0.156	3.96	0.086	2.44	59
5/32	4	016	0.039	1.00	0039	LH Only	0.156	3.96	0.116	2.95	45
			0.063	1.60	0063		0.156	3.96	0.086	2.44	59
			0.087	2.20	0087		0.164	4.17	0.128	3.25	67
			0.111	2.80	0111		0.164	4.17	0.128	3.25	67
			0.135	3.40	0135		0.164	4.17	0.128	3.25	67
			0.159	4.00	0159		0.164	4.17	0.128	3.25	67
3/16	5	018	0.025	0.64	0025		0.168	4.27	0.130	3.30	74
			0.039	1.00	0039		0.168	4.27	0.130	3.30	83
			0.050	1.27	0050		0.168	4.27	0.130	3.30	83
			0.063	1.60	0063		0.168	4.27	0.130	3.30	85
			0.075	1.91	0075		0.168	4.27	0.130	3.30	85
			0.087	2.20	0087		0.168	4.27	0.130	3.30	86
7/32	5.6	021	0.020	0.50	0020		0.168	4.27	0.130	3.30	86
			0.025	0.64	0025		0.168	4.27	0.130	3.30	86
			0.039	1.00	0039		0.168	4.27	0.130	3.30	86
			0.050	1.27	0050		0.168	4.27	0.130	3.30	86
			0.063	1.60	0063		0.168	4.27	0.130	3.30	86
			0.075	1.91	0075		0.168	4.27	0.130	3.30	86
7/32	5.6	021	0.020	0.50	0020		0.168	4.27	0.130	3.30	86
			0.025	0.64	0025		0.168	4.27	0.130	3.30	86
			0.039	1.00	0039		0.168	4.27	0.130	3.30	86
			0.050	1.27	0050		0.168	4.27	0.130	3.30	86
			0.063	1.60	0063		0.168	4.27	0.130	3.30	86
			0.075	1.91	0075		0.168	4.27	0.130	3.30	86
7/32	5.6	021	0.020	0.50	0020		0.168	4.27	0.130	3.30	86
			0.025	0.64	0025		0.168	4.27	0.130	3.30	86
			0.039	1.00	0039		0.168	4.27	0.130	3.30	86
			0.050	1.27	0050		0.168	4.27	0.130	3.30	86
			0.063	1.60	0063		0.168	4.27	0.130	3.30	86
			0.075	1.91	0075		0.168	4.27	0.130	3.30	86
7/32	5.6	021	0.020	0.50	0020		0.168	4.27	0.130	3.30	86
			0.025	0.64	0025		0.168	4.27	0.130	3.30	86
			0.039	1.00	0039		0.168	4.27	0.130	3.30	86
			0.050	1.27	0050		0.168	4.27	0.130	3.30	86
			0.063	1.60	0063		0.168	4.27	0.130	3.30	86
			0.075	1.91	0075		0.168	4.27	0.130	3.30	86

Shoulder areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Listed efficiencies are theoretical values based on Keritec® TFE coated lead screw
 ... Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 ... Base-case friction coefficient is .05-0.10%

Lead Screw Compatibility: 3DP Series

Diameter inches	Diameter mm	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*				
1/4	6	0.025	0.024	0.61	0.024	0.218	5.54	28	0.025	0.64	0.250	6.35	5.44	30
			0.03125	0.79	0.031	0.250	6.35	0.208	5.28	34				
			0.039	1.00	0.039	0.250	6.35	0.190	4.83	40				
			0.048	1.22	0.048	0.250	6.35	0.190	4.83	45				
			0.050	1.27	0.050	0.250	6.35	0.191	4.85	46				
			0.059	1.51	0.059	0.250	6.35	0.172	4.37	52				
			0.063	1.59	0.063	0.250	6.35	0.170	4.32	52				
			0.079	2.00	0.079	0.250	6.35	0.170	4.32	59				
			0.096	2.44	0.096	0.250	6.35	0.190	4.83	61				
			0.100	2.54	0.100	0.250	6.35	0.190	4.83	62				
			0.118	3.00	0.118	0.250	6.35	0.175	4.45	68				
			0.125	3.18	0.125	0.250	6.35	0.190	4.83	67				
			0.157	5.00	0.157	0.250	6.35	0.172	4.37	72				
			0.200	5.08	0.200	0.250	6.35	0.170	4.32	65				
			0.250	6.35	0.250	0.250	6.35	0.168	4.27	79				
			0.3125	7.94	0.3125	0.250	6.35	0.194	4.67	81				
			0.333	8.46	0.333	0.250	6.35	0.170	4.32	82				
			0.384	10.00	0.384	0.250	6.35	0.170	4.32	78				
0.400	10.16	0.400	0.250	6.35	0.170	4.32	84							
0.500	12.70	0.500	0.250	6.35	0.189	4.29	85							
0.750	19.05	0.750	0.250	6.35	0.170	4.32	86							
1.000	25.40	1.000	0.250	6.35	0.170	4.32	84							
3/8	10	0.037	0.025	0.64	0.025	0.337	8.56	21						
			0.039	1.00	0.039	0.384	10.01	0.350	8.89	28				
			0.04167	1.06	0.042	0.375	9.53	0.320	8.13	34				
			0.050	1.27	0.050	0.375	9.53	0.301	7.65	36				
			0.055	1.40	0.055	0.375	9.53	0.303	7.70	38				
			0.059	1.50	0.059	0.389	9.88	0.313	7.95	38				
			0.0625	1.59	0.063	0.388	9.86	0.295	7.49	41				
			0.068	1.73	0.068	0.388	9.86	0.295	7.49	42				
			0.079	2.00	0.079	0.375	9.53	0.284	7.17	47				
			0.083	2.12	0.083	0.375	9.53	0.283	7.44	48				
			0.100	2.54	0.100	0.375	9.53	0.296	6.76	53				
			0.125	3.18	0.125	0.375	9.53	0.295	7.49	59				
			0.157	4.00	0.157	0.375	9.53	0.274	6.96	65				
			0.1667	4.23	0.167	0.371	9.42	0.261	6.63	61				
			0.197	5.00	0.197	0.375	9.53	0.286	6.76	69				
			0.200	5.08	0.200	0.375	9.53	0.288	6.76	69				
			0.250	6.35	0.250	0.375	9.53	0.288	6.81	70				
			0.300	7.62	0.300	0.375	9.53	0.255	6.46	76				
0.333	8.46	0.333	0.375	9.53	0.245	6.22	78							
0.363	9.22	0.363	0.375	9.53	0.260	6.60	79							
0.375	9.53	0.375	0.275	9.53	0.265	6.73	79							
0.384	10.00	0.384	0.375	9.53	0.260	6.60	79							
0.400	10.16	0.400	0.375	9.53	0.283	7.44	79							
0.472	12.00	0.472	0.388	9.86	0.297	7.29	82							
0.500	12.70	0.500	0.388	9.86	0.295	6.73	81							
0.567	14.34	0.567	0.375	9.53	0.273	6.93	83							
0.667	16.94	0.667	0.388	9.86	0.273	6.63	84							
0.750	19.05	0.750	0.375	9.53	0.264	6.65	84							
1.000	25.40	1.000	0.383	9.73	0.254	6.45	84							
1.200	30.48	1.200	0.383	9.73	0.254	6.45	84							
1.250	31.75	1.250	0.375	9.53	0.278	7.06	84							
1.500	38.10	1.500	0.375	9.53	0.264	6.71	83							

* Lead efficiencies are theoretical values based on Kerkote® TFE coated lead screw.
 ** Lead efficiencies for Micro screws are theoretical values based on non-coated lead screws.
 *** Back-drive threshold is 50-10%.

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

BFW Nut Series

Conventional style, without "anti-backlash" function. The BFW Series general purpose "free-wheeling" nut is for applications not requiring anti-backlash and wear compensation. It provides effective power transmission at minimum cost, and features long life, self-lubricating polyacetel nuts.

The secure mounting and convenience of a circular flange is standard on the BFW nuts with triangular flange and thread mounting as an option. Many custom configurations are available.

Screws are 303 stainless steel with extended life, custom Kerkote® TFE coating optional. Assemblies can be supplied cut-to-length or with ends machined to customer requirements and Kerkote® TFE screw coating are optional.

BFW Micro Nut Series

The BFW Micro Series enables a whole new range of micro-sized designs. It allows the miniaturization without sacrificing performance or reliability.

BFW Series Nut Assemblies



BFW Micro Series Nut Assemblies

Technical Data

Material	Polyacetel, Lubricant Additive
Tensile Strength	9,700 psi
Coefficient of Expansion	6.0 x 10 ⁻⁵ in/in/°F
Coefficient of Friction Polyacetel Nut to Screw	Static = .08 Dynamic = .15 .09 **
Standard Operating Temperature Range	32 - 200° F (0 - 93° C)†

† Max. high- & low temperatures may cause significant changes in the nut fit or drag torque. Please call the K&E Engineering Team at 603 213 6290 for optional temperature range materials.
 ** with Kerkote® TFE Coating.

Identifying the BFW Series Nut Part Number Codes when Ordering

BFW Prefix	A Nut Mounting Style	K Lubrication	R Thread Direction	018 Diameter Code	0020 Nominal Thread Lead Code	XXXX Unique Identifier
BFW	A = Flanged (Triangular) F = Flanged (Round) T = Threaded N = Custom For Mini and Micro Series Only: B = Barrel in J R = Rectangular in U	S = Uncoated K = Kerkote® TFE Coating G = Grease M = Nut only B = Black K® TFE Coating	R = Right hand L = Left hand (Not Available for Micro Series) (Refer to lead screw charts for availability)	008 = .078 in (2 mm) 012 = .125 in (3.2 mm) 013 = .133 in (3.3 mm) 014 = .141 in (3.6 mm) 016 = .156 in (4 mm) 018 = .188 in (5 mm) 021 = .219 in (5.6 mm) 025 = .250 in (6 mm) 031 = .313 in (8 mm) 037 = .375 in (10 mm) 043 = .438 in (11 mm) 050 = .500 in (13 mm) 062 = .625 in (16 mm) 075 = .750 in (19 mm) 087 = .875 in (22 mm) 093 = .938 in (24 mm)	(Refer to LEAD CODE Specifications charts, pages 5 to 9)	Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.


NOTE: Diameters must be included in Part Number (H) as shown above. For assistance call our Engineering Team at 603 213 6290.

Dimensional Drawings

BFW Round Flange Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load** lbs (kg)
1/4 (6)	.50 (12.7)	1.0 (25.4)	1.00 (25.4)	.19 (4.8)	.140 (3.56)	.750 (19.05)	50 (20)
5/16 (8)	.63 (15.9)	1.0 (25.4)	1.13 (28.7)	.19 (4.8)	.140 (3.56)	.875 (22.23)	75 (35)
3/8 (10)	.63 (15.9)	1.0 (25.4)	1.13 (28.7)	.19 (4.8)	.140 (3.56)	.875 (22.23)	75 (35)
7/16 (11)	.75 (19.1)	1.5 (38)	1.50 (38.1)	.19 (4.8)	.203 (5.16)	1.125 (28.58)	90 (40)
1/2 (13)	.75 (19.1)	1.5 (38)	1.50 (38.1)	.19 (4.8)	.203 (5.16)	1.125 (28.58)	150 (68)
5/8 (16)	.88 (22.2)	1.5 (38)	1.50 (38.1)	.19 (4.8)	.203 (5.16)	1.188 (30.18)	225 (100)
3/4 (19)	1.12 (28.4)	2.0 (51)	1.75 (44.4)	.25 (6.4)	.203 (5.16)	1.438 (36.53)	350 (160)
7/8 (22)	1.50 (38.1)	2.0 (51)	2.25 (57.1)	.25 (6.4)	.203 (5.16)	1.875 (47.63)	500 (227)
15/16 (24)	1.50 (38.1)	2.0 (51)	2.25 (57.1)	.25 (6.4)	.203 (5.16)	1.875 (47.63)	500 (227)


Metric numbers are for reference only.

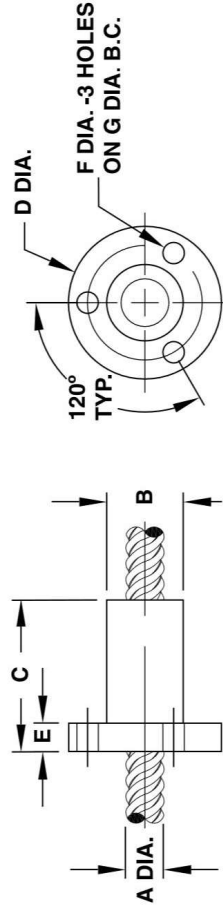

BFW Triangular Flange Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load** lbs (kg)
1/4 (6)	.50 (12.7)	1.0 (25.4)	1.00 (25.4)	.17 (4.3)	.143 (3.63)	.750 (19.05)	50 (20)
5/16 (8)	.50 (12.7)	1.3 (48.3)	1.50 (38.1)	.17 (4.3)	.197 (5.00)	1.125 (28.58)	75 (35)
3/8 (10)	.66 (16.6)	1.3 (48.3)	1.50 (38.1)	.17 (4.3)	.197 (5.00)	1.125 (28.58)	75 (35)
7/16 (11)	.75 (19.1)	1.3 (48.3)	1.50 (38.1)	.17 (4.3)	.197 (5.00)	1.125 (28.58)	90 (40)
1/2 (13)	.75 (19.1)	1.3 (48.3)	1.50 (38.1)	.17 (4.3)	.197 (5.00)	1.125 (28.58)	150 (68)


Metric numbers are for reference only.

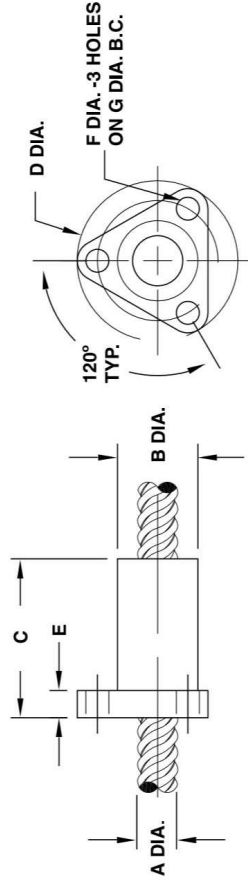

BFW Thread Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Thread M* inch	Thread Length N inch (mm)	Dynamic Load** lbs (kg)
1/4 (6)	.63 (15.9)	1.0 (25.4)	9/16 - 18	.187 (4.75)	50 (20)
5/16 (8)	.75 (19.1)	1.0 (25.4)	5/8 - 18	.250 (6.35)	75 (35)
3/8 (10)	.75 (19.1)	1.0 (25.4)	5/8 - 18	.250 (6.35)	75 (35)
7/16 (11)	1.00 (25.4)	1.5 (38.1)	15/16 - 16	.375 (9.53)	90 (40)
1/2 (13)	1.00 (25.4)	1.5 (38.1)	15/16 - 16	.375 (9.53)	150 (68)
5/8 (16)	1.00 (25.4)	1.5 (38.1)	15/16 - 16	.375 (9.53)	225 (100)
3/4 (19)	1.50 (38.1)	2.0 (51)	1 3/8 - 16	.500 (12.70)	350 (160)
7/8 (22)	1.50 (38.1)	2.0 (51)	1 3/8 - 16	.500 (12.70)	500 (227)
15/16 (24)	1.50 (38.1)	2.0 (51)	1 3/8 - 16	.500 (12.70)	500 (227)


Metric numbers are for reference only.

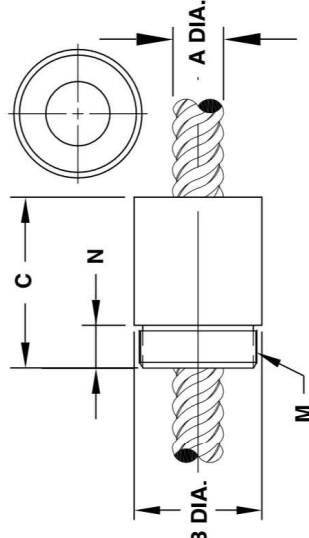

BFW Mini Rectangular Flange Mount

Screw Diam. A inch (mm)	Nut Diam. B inch (mm)	Nut Length C inch (mm)	Flange Height D1 inch (mm)	Flange Diam. D inch (mm)	Flange Thickness E inch (mm)	Mounting Hole Diam. F inch (mm)	Bolt Circle Diam. G inch (mm)	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	0.40 (10.2)	0.75 (19.1)	0.13 (3.2)	0.120 (3.05)	0.600 (15.24)	25 (11)	Free Wheeling


Metric numbers are for reference only.

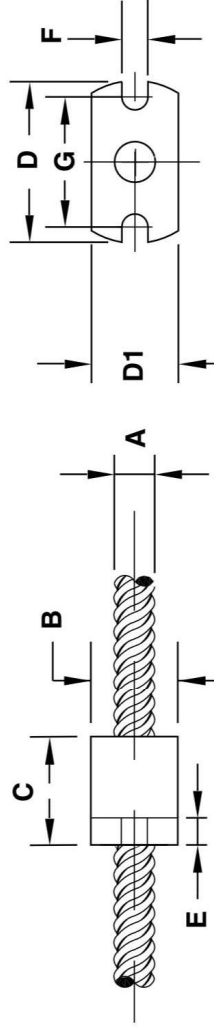

BFW Mini Thread Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Thread M*	Thread Length N	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	3/8-24	0.187 (4.75)	25 (11)	Free Wheeling


Metric numbers are for reference only.

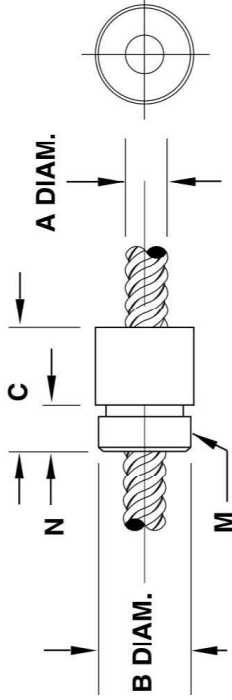

BFW Micro Barrel Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Nut Flats D	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
5/64 (2)	0.22 (5.5)	0.32 (8)	0.20 (5.08)	10 (4.5)	Free Wheeling


Metric numbers are for reference only.

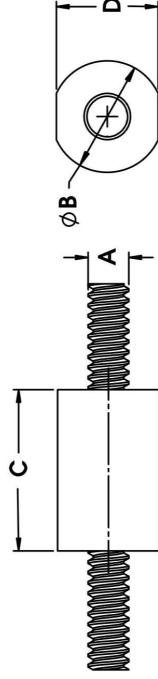

BFW Micro Rectangular Flange Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Flange Height D1	Flange Diam. D	Flange Thickness E	Mounting Hole Diam. F	Bolt Circle Diam. G	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
5/64 (2)	0.22 (5.5)	0.32 (8)	0.22 (5.5)	0.47 (11.9)	0.08 (2.0)	0.07 (1.8)	0.35 (9.0)	10 (4.5)	Free Wheeling

Metric numbers are for reference only.

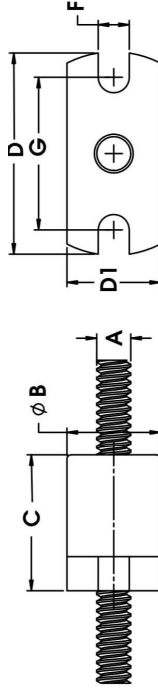

Lead Screw Compatibility: BFW Series


Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
5/64	2	008	0.012	0.30	0012		0.079	2.01	0.068	1.73	24**
			0.016	0.40	0016		0.075	1.91	0.058	1.47	30**
			0.020	0.50	0020		0.077	1.96	0.067	1.45	36**
			0.028	1.00	0028		0.079	2.01	0.059	1.50	52**
			0.079	2.00	0079		0.077	1.96	0.067	1.45	66**
			0.024	0.61	0024		0.129	3.28	0.093	2.36	
1/8	3.2	012	0.039	1.00	0039		0.129	3.28	0.094	2.39	57
			0.048	1.22	0048		0.129	3.28	0.093	2.36	61
			0.075	1.91	0075		0.129	3.28	0.093	2.36	70
			0.096	2.44	0096	*	0.129	3.28	0.093	2.36	75
			0.125	3.18	0125	LH Only	0.125	3.18	0.078	1.98	80
			0.020	0.50	0020		0.132	3.35	0.104	2.64	42
.132	3.3	013	0.039	1.00	0039		0.132	3.35	0.090	2.03	61
			0.079	2.00	0079		0.132	3.35	0.090	2.03	75
			0.157	4.00	0157		0.132	3.35	0.090	2.03	84
			0.315	8.00	0315		0.132	3.35	0.090	2.03	87
			0.012	0.30	0012		0.140	3.56	0.123	3.12	26
			0.024	0.61	0024		0.140	3.56	0.105	2.67	43
9/64	3.6	014	0.048	1.22	0048		0.140	3.56	0.091	2.06	62
			0.096	2.44	0096		0.140	3.56	0.091	2.06	75
			0.394	10.00	0394		0.140	3.56	0.102	2.59	86
			0.033	0.84	0033	*	0.156	3.96	0.116	2.95	45
			0.050	1.27	0050	LH Only	0.156	3.96	0.096	2.44	59
			0.094	2.39	0094		0.164	4.17	0.128	3.25	67
5/32	4	016	0.125	3.18	0125		0.168	4.27	0.130	3.30	74
			0.250	6.35	0250		0.156	3.96	0.130	3.30	83
			0.375	9.53	0375		0.156	3.96	0.130	3.30	85
			0.500	12.70	0500		0.156	3.96	0.130	3.30	86
			0.620	0.50	0620		0.188	4.78	0.163	4.14	30
			0.625	0.64	0625		0.188	4.78	0.150	3.81	39
3/16	5	018	0.039	1.00	0039		0.188	4.78	0.144	3.06	47
			0.050	1.27	0050		0.188	4.78	0.124	3.15	58
			0.100	2.54	0100		0.188	4.78	0.136	3.45	69
			0.1975	4.76	0198		0.188	4.78	0.167	4.24	78
			0.300	5.08	0300		0.188	4.78	0.124	3.15	82
			0.375	9.53	0375		0.188	4.78	0.161	4.09	84
0.400	10.15	0400		0.188	4.78	0.124	3.15	84			
0.427	10.85	0427		0.188	4.78	0.162	4.11	85			
0.500	12.70	0500		0.188	4.78	0.142	3.61	86			

* Lead efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 ** Lead efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 *** Backlash efficiencies are theoretical values based on non-coated lead screw

BFW Mini Thread Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Thread M*	Thread Length N	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
1/8 inch through 7/32 inch (3 mm through 5.6 mm)	0.40 (10.2)	0.50 (13)	3/8-24	0.187 (4.75)	25 (11)	Free Wheeling


Metric numbers are for reference only.

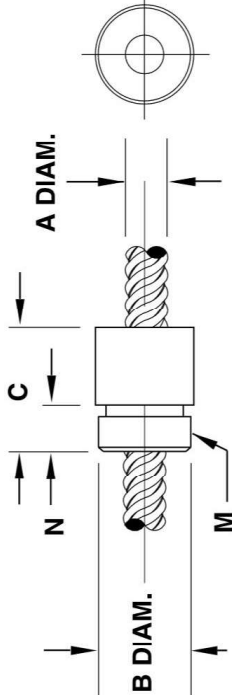

BFW Micro Barrel Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Nut Flats D	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
5/64 (2)	0.22 (5.5)	0.32 (8)	0.20 (5.08)	10 (4.5)	Free Wheeling


Metric numbers are for reference only.

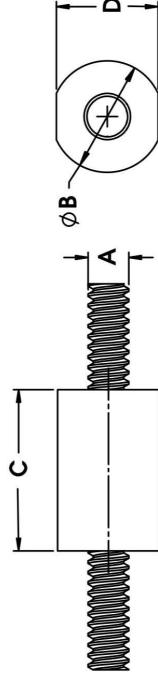

BFW Micro Rectangular Flange Mount

Screw Diam. A	Nut Diam. B	Nut Length C	Flange Height D1	Flange Diam. D	Flange Thickness E	Mounting Hole Diam. F	Bolt Circle Diam. G	Dynamic Load lbs (kg)	Drag Torque oz-in (N-m)
5/64 (2)	0.22 (5.5)	0.32 (8)	0.22 (5.5)	0.47 (11.9)	0.08 (2.0)	0.07 (1.8)	0.35 (9.0)	10 (4.5)	Free Wheeling

Metric numbers are for reference only.

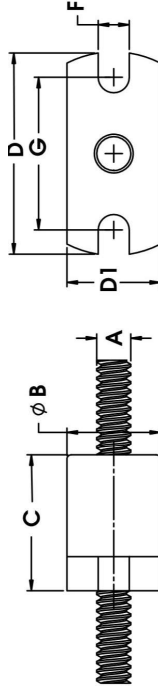

Lead Screw Compatibility: BFW Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
7/32	5.6	021	0.024	0.61	0024		0.218	5.54	0.181	4.60	31
			0.02125	0.79	0031		0.204	5.18	0.150	4.06	39
			0.048	1.22	0048		0.216	5.49	0.196	3.96	50
			0.050	1.27	0050		0.200	5.08	0.135	3.43	52
			0.0625	1.59	0063		0.218	5.54	0.142	3.61	60
			0.086	2.44	0086		0.218	5.54	0.156	3.86	66
			0.192	4.88	0192		0.218	5.54	0.196	3.96	78
			0.250	6.35	0250		0.204	5.18	0.140	3.56	81
			0.384	9.75	0384		0.218	5.54	0.189	4.04	86
			0.624	0.61	0624		0.250	6.35	0.218	5.54	28
			0.625	0.64	0625		0.250	6.35	0.214	5.44	30
			0.03125	0.79	0031		0.250	6.35	0.208	5.28	34
0.039	1.00	0039		0.250	6.35	0.190	4.83	40			
0.048	1.22	0048		0.250	6.35	0.190	4.83	45			
0.050	1.27	0050		0.250	6.35	0.191	4.85	46			
0.059	1.50	0059		0.250	6.35	0.172	4.37	52			
0.0625	1.59	0063		0.250	6.35	0.170	4.32	52			
0.079	2.00	0079		0.250	6.35	0.170	4.32	59			
0.096	2.44	0096		0.250	6.35	0.190	4.83	61			
0.100	2.54	0100		0.250	6.35	0.190	4.83	62			
0.118	3.00	0118		0.250	6.35	0.175	4.45	68			
0.125	3.18	0125		0.250	6.35	0.190	4.83	67			
0.197	5.00	0197		0.250	6.35	0.172	4.37	72			
0.200	5.08	0200		0.250	6.35	0.170	4.32	79			
0.250	6.35	0250		0.250	6.35	0.168	4.27	81			
0.3125	7.94	0313		0.250	6.35	0.194	4.67	81			
0.384	10.00	0384		0.250	6.35	0.170	4.32	78			
0.400	10.16	0400		0.250	6.35	0.170	4.32	84			
0.500	12.70	0500		0.250	6.35	0.189	4.29	85			
0.750	19.05	0750		0.250	6.35	0.170	4.32	86			
1.000	25.40	1000		0.250	6.35	0.170	4.32	84			
0.039	1.00	0039		0.315	8.00	0.261	6.63	34			
0.057	1.44	0057		0.315	8.00	0.243	6.17	43			
0.0741	1.88	0074		0.312	7.92	0.211	5.36	51			
0.111	2.82	0111		0.312	7.92	0.222	5.89	60			
0.167	4.24	0167		0.312	7.92	0.211	5.36	69			
0.250	6.35	0250		0.312	7.92	0.234	5.94	76			
0.500	12.70	0500		0.312	7.92	0.232	5.89	83			
0.800	20.32	0800		0.306	7.77	0.243	6.17	86			

*Lead efficiencies are theoretical values based on (Kerk)® TFE coated/lead screw.
 **Lead efficiencies for AMETEK are theoretical values based on uncoated lead screws.
 ***Back-drive threshold is 50-10%.

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screw Compatibility: BFW Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/8	10	037	0.025	0.64	0025		0.375	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.53	0.370	8.13	34
			0.050	1.27	0050		0.375	9.53	0.301	7.65	36
			0.065	1.40	0065		0.375	9.53	0.303	7.70	38
			0.069	1.50	0069		0.389	9.88	0.313	7.95	38
			0.0625	1.59	0063		0.388	9.86	0.295	7.49	41
			0.068	1.73	0068		0.388	9.86	0.295	7.49	42
			0.079	2.00	0079		0.375	9.53	0.284	6.71	47
			0.083	2.12	0083		0.375	9.53	0.283	7.44	48
			0.100	2.54	0100		0.375	9.53	0.286	6.76	53
			0.125	3.18	0125		0.375	9.53	0.295	7.49	59
0.167	4.00	0167		0.375	9.53	0.274	6.96	65			
0.197	5.00	0197		0.371	9.42	0.291	6.63	61			
0.200	5.08	0200		0.375	9.53	0.286	6.76	69			
0.250	6.35	0250		0.375	9.53	0.286	6.76	69			
0.300	7.62	0300		0.375	9.53	0.288	6.81	70			
0.333	8.46	0333		0.375	9.53	0.245	6.48	76			
0.363	9.22	0363		0.375	9.53	0.260	6.60	79			
0.375	9.53	0375		0.375	9.53	0.285	6.73	79			
0.384	10.00	0384		0.375	9.53	0.280	6.60	79			
0.400	10.16	0400		0.375	9.53	0.283	7.44	79			
0.472	12.00	0472		0.388	9.86	0.297	7.29	82			
0.500	12.70	0500		0.388	9.86	0.285	6.73	81			
0.687	16.94	0687		0.375	9.53	0.273	6.93	83			
0.687	19.05	0750		0.388	9.86	0.273	6.93	84			
0.884	25.00	0884		0.375	9.53	0.282	6.65	84			
1.000	25.40	1000		0.383	9.73	0.284	6.45	84			
1.200	30.48	1200		0.383	9.73	0.284	6.45	84			
1.250	31.75	1250		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.284	6.71	83			
0.050	1.27	0050		0.437	11.10	0.362	9.19	30			
0.0625	1.59	0063		0.436	11.07	0.368	9.09	38			
0.079	2.00	0079		0.472	11.99	0.374	9.50	42			
0.111	2.82	0111		0.437	11.10	0.327	8.31	52			
0.118	3.00	0118		0.438	11.13	0.363	9.22	52			
0.125	3.18	0125		0.438	11.13	0.357	9.07	54			
0.197	5.00	0197		0.438	11.13	0.315	8.00	65			
0.236	6.00	0236		0.433	11.00	0.313	7.95	70			
0.250	6.35	0250		0.442	11.23	0.325	8.26	70			
0.307	7.80	0307		0.445	11.30	0.343	8.71	73			
0.325	8.26	0325		0.444	11.28	0.342	8.69	74			
0.384	10.00	0384		0.446	11.33	0.331	8.41	78			
0.472	12.00	0472		0.498	11.13	0.318	8.08	80			
0.500	12.70	0500		0.452	11.48	0.327	8.31	80			
0.615	15.62	0615		0.475	12.07	0.376	9.55	82			

Lead Screw Compatibility: BFW Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
1/2	13	050	0.450	1.27	0650		0.495	12.57	0.433	11.00	29
			0.079	2.00	0979		0.473	12.01	0.355	9.02	41
			0.089	2.50	0989		0.500	12.70	0.383	9.73	46
			0.100	2.54	0100	•	0.490	12.45	0.394	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.394	9.75	58
			0.160	4.06	0160		0.500	12.70	0.388	9.86	67
			0.1867	4.23	0167		0.500	12.70	0.394	9.75	58
			0.197	5.00	0197		0.500	12.70	0.385	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.366	9.30	63
			0.250	6.35	0250		0.500	12.70	0.392	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.362	9.19	73
			0.384	10.00	0384		0.497	12.62	0.362	9.19	76
			0.400	10.16	0400		0.497	12.62	0.364	9.25	76
			0.500	12.70	0500		0.488	12.40	0.352	8.94	79
0.630	16.00	0630		0.500	12.70	0.374	9.50	80			
0.750	19.05	0750		0.525	13.34	0.389	10.13	83			
0.800	20.32	0800		0.500	12.70	0.370	9.40	83			
0.884	25.00	0884	•	0.490	12.45	0.372	9.45	84			
1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85			
2.000	50.80	2000		0.488	12.40	0.378	9.60	87			
0.100	2.54	0100		0.615	15.62	0.488	12.65	40			
0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45			
0.200	5.08	0200		0.625	15.88	0.485	12.57	53			
0.250	6.35	0250		0.625	15.88	0.469	11.91	63			
0.315	8.00	0315		0.627	15.80	0.483	12.52	68			
0.410	10.41	0410	•	0.625	15.88	0.491	12.22	72			
0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76			
0.630	16.00	0630		0.625	15.88	0.491	12.47	78			
1.000	25.40	1000		0.625	15.88	0.481	12.22	83			
1.500	38.10	1500		0.625	15.88	0.499	12.67	85			
1.575	40.00	1575	•	0.625	15.88	0.499	12.67	86			
2.000	50.80	2000	•	0.625	15.88	0.499	12.67	86			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
* Listed efficiencies are theoretical values based on Kerf@TTC coated lead screw
** Listed efficiencies for micro screws are theoretical values based on non-coated lead screws
*** Back-drive threshold is 60-10%

Lead Screw Compatibility: BFW Series

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
3/4	19	075	0.0625	1.59	0683		0.750	19.05	0.671	17.04	25
			0.088	2.50	0688		0.742	18.85	0.626	15.90	35
			0.100	2.54	0100	•	0.746	18.85	0.624	15.85	35
			0.1867	4.23	0167		0.727	18.47	0.645	16.38	47
			0.197	5.00	0197		0.745	18.82	0.624	15.85	51
			0.200	5.08	0200		0.741	18.82	0.632	16.05	52
			0.250	6.35	0250		0.731	18.37	0.639	16.23	57
			0.276	7.00	0276		0.750	19.05	0.624	15.85	59
			0.333	8.46	0333		0.750	19.05	0.624	15.85	64
			0.384	10.00	0384		0.745	18.82	0.619	15.72	67
			0.400	10.27	0400		0.744	18.80	0.624	15.85	73
			0.551	14.00	0551		0.750	19.05	0.624	15.85	73
			0.591	15.00	0591		0.749	19.02	0.623	15.82	74
			0.709	18.00	0709		0.790	19.81	0.690	16.51	77
			0.748	19.00	0748		0.872	17.07	0.547	13.89	80
0.787	20.00	0787		0.780	19.81	0.648	16.46	78			
0.800	20.32	0800		0.750	19.05	0.618	15.70	79			
0.845	24.00	0845		0.794	18.64	0.633	16.08	80			
1.000	25.40	1000	•	0.743	18.87	0.619	15.72	81			
1.500	38.10	1500		0.712	18.08	0.590	14.99	84			
1.989	50.00	1989		0.751	19.08	0.620	15.75	84			
2.000	50.80	2000	•	0.742	18.85	0.611	15.52	84			
2.400	60.96	2400	•	0.750	19.05	0.620	15.75	84			
3.622	92.00	3622	•	0.750	19.05	0.634	16.10	87			
0.200	5.08	0200		0.870	22.10	0.742	18.85	48			
0.236	6.00	0236		0.848	21.54	0.773	19.63	52			
0.250	6.35	0250		0.875	22.23	0.749	19.02	53			
0.384	10.00	0384		0.875	22.23	0.741	18.82	65			
0.500	12.70	0500		0.862	21.89	0.744	18.90	69			
0.630	16.00	0630		0.875	22.23	0.741	18.82	73			
0.867	18.54	0867		0.871	22.12	0.745	18.92	74			
0.987	20.00	0987		0.875	22.23	0.741	18.82	78			
0.945	24.00	0945		0.875	22.23	0.741	18.82	79			
1.000	25.40	1000		0.871	22.12	0.742	18.85	80			
0.650	1.27	0650		0.658	23.89	0.874	22.20	17			
2.000	50.80	2000		0.927	23.55	0.815	20.70	85			
3.000	76.20	3000	•	0.959	23.85	0.883	20.40	86			

Shaded areas have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.
* Listed efficiencies are theoretical values based on Kerf@TTC coated lead screw
** Listed efficiencies for micro screws are theoretical values based on non-coated lead screws
*** Back-drive threshold is 60-10%

Kerk® Lead Screws

Manufactured from 303 stainless steel and produced with Kerk's exclusive precision rolling process. Available in standard diameters from 1/8-in (3.2mm) to 15/16-in (23mm), with standard leads from .012-in to almost 4-in (0.30mm to 92mm) including metric and left hand threads. Custom sizes and leads can be special ordered. Positional bi-directional repeatability with Kerk anti-backlash nut is within 50 micro-inches (1.25 micron) and standard lead accuracy is better than 0.0006-in./in. (mm/mm). Lead accuracies are available to .0001-in./in. (mm/mm). The surface finish is better than 16 micro-inches (0.4 µm). Please consult factory for more details. Kerk stainless steel lead screws and guide rails are corrosion resistant, non-magnetic, and compatible with many demanding processes.



Identifying the Lead Screw Part Number Codes when Ordering

LSS	S	K	R	025	0024	EY10
Prefix	Nut Mounting Style	Lubrication	Thread Direction	Diameter Code	Nominal Thread Lead Code	Unique Identifier
LSS = Screw Only	S = Screw Only X = Custom	S = Uncoated K = Kerkite® TFE Coating G = Grease N = Nut only B = Black Ice® TFE Coating	R = Right hand L = Left hand (Refer to lead screw charts for availability)	008" = .078-in (2) 012" = .125-in (3.2) 013" = .139-in (3.3) 014" = .141-in (3.6) 016" = .156-in (4) 018" = .188-in (5) 021" = .219-in (5.6) 025 = .250-in (6) 031 = .313-in (8) 037 = .375-in (10) 043 = .438-in (11) 050 = .500-in (13) 062 = .625-in (16) 075 = .750-in (19) 087 = .875-in (22) 093 = .938-in (24)	(Refer to LEAD CODE Specifications charts, pages 2 to 6)	FY06 = 6° CTL Kerk Threadform EY10 = 10° C-T-L Haydon Threadform

NOTE: Charts must be included in Part Number H as shown above. For assistance call our Engineering Team at 603.213.6290.

Material & Teflon TFE Coating Options

Materials		Teflon TFE Coatings
Kerkite® Composite Polymer Nuts	In addition to the Kerk® self-lubricating acetal nut material, we offer a variety of custom compounded Kerkite composite polymers. Kerkite polymers are a family of high performance materials that offer exceptional wear properties with the cost and design advantages afforded through injection molding. Kerkite polymers offer a variety of mechanical, thermal and electrical properties and are compatible with many chemicals and environmental conditions. Each member of the Kerkite family is compounded with lubricants, reinforcements and thermoplastic polymers formulated to provide optimum performance in its target conditions and applications.	Soft coating that is a long-term, maintenance-free, dry lubricant, optimized for softer plastics like acetals and nylons, with or without mechanical reinforcement. Lubrication to the nut/screw interface occurs by the nut picking up Kerkite® TFE particles from the coating as well as from the migration of the internal lubricant within the plastic nut. The transfer of TFE to the nut continues throughout the operating life of the assembly as long as the nut periodically travels over areas with Kerkite® TFE coating. The lubricant, although solid, also has some "spreading" ability as in fluid lubricants. Kerkite® TFE coated screws provide the maximum level of self-lubrication and should not be additionally lubricated or used in environments where oils or other lubricant contamination is possible.
Special Materials	Kerk® has rolled screws in many materials, including 316 stainless, 400 series stainless, precipitate hardening materials, carbon steel, aluminum, and titanium. Kerk® nuts have been produced in many alternative plastics including PEEK, polyester, Torlon®, Vespel®, PVDF, UHMW, Ertalyte®, customer-supplied specialty materials, and metal nuts made from bronze, brass, and stainless steel. If the material can be machined, machined, ground, or rolled, we can likely process it.	Hard coating that is long term, maintenance-free and is exceptionally durable in all types of environments, with virtually any type of polymer nut. Black Ice® TFE coating remains on the screw, offering a low friction surface upon which the nut travels. Rather than acting as a dry lubricant, Black Ice® TFE is an anti-friction coating whose surface properties displace the metal to which it is applied. Though it is not intended for use with metal or glass fiber reinforced nuts, Black Ice® TFE is bonded securely to the screw's surface and can withstand abrasion from contamination, rigid polymer systems, fluid impingement and wash down applications. Black Ice® TFE can be used in more aggressive environment conditions, or anywhere reduced friction and a permanent coating is desired. Not intended to be used with additional lubricants.

NOTE: There are certain applications where external lubrication may be desired. These include the use of nut materials such as glass reinforced plastic or metal. Please contact a sales engineer for assistance selecting the best lubricant for your requirements. Offer a solution of greases developed specifically for these applications. Please contact a sales engineer for assistance selecting the best lubricant for your requirements.

Lead Screws

Kerk Lead Screws utilize the latest in precision rolling technology. Lead screws are available in standard diameters from 3/64" to 15/16" and includes metric and left hand threads. Most standard lead screws are manufactured from 303 stainless steel and are produced using our exclusive precision rolling process. Other lead screw materials are available for application specific requirements.

Diameter and Lead Codes

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
5/64 (.078) Micro Series	2	006 µ	0.012	0.30	0012		0.079	2.01	0.068	1.73	24**
			0.016	0.40	0016		0.075	1.91	0.058	1.47	30**
			0.020	0.50	0020		0.077	1.96	0.057	1.45	38**
			0.030	1.00	0030		0.079	2.01	0.059	1.50	52**
			0.079	2.00	0079		0.077	1.96	0.057	1.45	66**
			0.024	0.61	0024		0.129	3.28	0.083	2.36	44
1/8 (.125)	3.2	012 m	0.039	1.00	0039		0.129	3.28	0.084	2.39	57
			0.048	1.22	0048		0.129	3.28	0.083	2.36	61
			0.075	1.91	0075		0.129	3.28	0.083	2.36	70
			0.096	2.44	0096	•	0.129	3.28	0.083	2.36	75
			0.125	3.18	0125	LH Only	0.125	3.18	0.078	1.98	80
			0.020	0.50	0020		0.132	3.35	0.104	2.64	42
17/128 (.132)	3.3	013 m	0.039	1.00	0039		0.132	3.35	0.080	2.03	61
			0.079	2.00	0079		0.132	3.35	0.080	2.03	75
			0.157	4.00	0157		0.132	3.35	0.080	2.03	84
			0.315	8.00	0315		0.132	3.35	0.080	2.03	87
			0.012	0.30	0012		0.140	3.56	0.123	3.12	26
			0.024	0.61	0024		0.140	3.56	0.105	2.67	43
9/64 (.141)	3.6	014 m	0.048	1.22	0048		0.140	3.56	0.081	2.06	62
			0.096	2.44	0096		0.140	3.56	0.081	2.06	75
			0.384	10.00	0384		0.140	3.56	0.102	2.59	86
			0.033	0.84	0033	•	0.156	3.96	0.116	2.95	45
			0.050	1.27	0050	LH Only	0.156	3.96	0.086	2.44	59
			0.084	2.39	0084		0.164	4.17	0.128	3.25	67
5/32 (.156)	4	016 m	0.125	3.18	0125		0.168	4.27	0.130	3.30	74
			0.250	6.35	0250		0.156	3.96	0.130	3.30	83
			0.375	9.53	0375		0.156	3.96	0.130	3.30	85
			0.500	12.70	0500		0.156	3.96	0.130	3.30	86
			0.020	0.50	0020		0.188	4.78	0.163	4.14	30
			0.025	0.64	0025		0.188	4.78	0.150	3.81	39
3/16 (.188)	5	018 m	0.039	1.00	0039		0.188	4.78	0.144	3.06	47
			0.050	1.27	0050		0.188	4.78	0.124	3.15	58
			0.100	2.54	0100		0.188	4.78	0.136	3.45	69
			0.1975	4.76	0198		0.188	4.78	0.167	4.24	78
			0.300	5.08	0300		0.188	4.78	0.124	3.15	82
			0.375	9.53	0375		0.188	4.78	0.161	4.09	84
5/16 (.313)	8	031	0.400	10.16	0400		0.188	4.78	0.124	3.15	84
			0.427	10.85	0427		0.188	4.78	0.162	4.11	85
			0.500	12.70	0500	•	0.188	4.78	0.142	3.61	86

Standard axes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

* Lead efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 ** Lead efficiencies for Micro Series are theoretical values based on non-coated lead screw
 *** Base-core thread is 50-10%

Diameter and Lead Codes

Diameter inches	Diameter mm	Diameter Code	Lead inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) inches	Outside Diameter (for reference) mm	Root Diameter (for reference) inches	Root Diameter (for reference) mm	Efficiency %*
7/32 (.219)	5.6	021 m	0.024	0.61	0024		0.218	5.54	0.181	4.60	31
			0.03125	0.79	0031		0.204	5.16	0.160	4.06	39
			0.048	1.22	0048		0.216	5.49	0.156	3.96	50
			0.050	1.27	0050		0.200	5.08	0.135	3.43	52
			0.086	2.44	0086		0.218	5.54	0.142	3.61	60
			0.192	4.88	0192		0.218	5.54	0.156	3.96	66
1/4 (.250)	6	025	0.250	6.35	0250	•	0.204	5.16	0.140	3.56	81
			0.384	9.75	0384		0.218	5.54	0.159	4.04	86
			0.500	12.70	0500		0.250	6.35	0.218	5.54	28
			0.625	15.88	0625		0.250	6.35	0.214	5.44	30
			0.875	22.13	0875		0.250	6.35	0.208	5.28	34
			1.000	25.40	1000		0.250	6.35	0.208	5.28	34
5/16 (.313)	8	031	0.375	9.53	0375		0.250	6.35	0.190	4.83	40
			0.440	11.18	0440		0.250	6.35	0.190	4.83	45
			0.500	12.70	0500	•	0.250	6.35	0.191	4.85	46
			0.562	14.27	0562		0.250	6.35	0.172	4.37	52
			0.625	15.88	0625		0.250	6.35	0.170	4.32	52
			0.688	17.48	0688		0.250	6.35	0.170	4.32	59
3/8 (.375)	9.5	036	0.625	15.88	0625		0.250	6.35	0.190	4.83	61
			0.688	17.48	0688		0.250	6.35	0.190	4.83	62
			0.750	19.05	0750		0.250	6.35	0.175	4.45	68
			0.812	20.62	0812		0.250	6.35	0.190	4.83	67
			0.875	22.13	0875		0.250	6.35	0.172	4.37	72
			0.938	23.71	0938		0.250	6.35	0.170	4.32	72
7/16 (.438)	11.2	043	0.875	22.13	0875		0.250	6.35	0.190	4.83	65
			0.938	23.71	0938		0.250	6.35	0.168	4.27	79
			1.000	25.40	1000		0.250	6.35	0.168	4.27	79
			1.062	27.00	1062		0.250	6.35	0.194	4.67	81
			1.125	28.58	1125		0.250	6.35	0.170	4.32	82
			1.188	30.17	1188		0.250	6.35	0.170	4.32	78
1/2 (.500)	12.7	050	1.000	25.40	1000		0.250	6.35	0.170	4.32	84
			1.062	27.00	1062		0.250	6.35	0.170	4.32	84
			1.125	28.58	1125		0.250	6.35	0.169	4.29	85
			1.188	30.17	1188		0.250	6.35	0.170	4.32	86
			1.250	31.75	1250		0.250	6.35	0.170	4.32	84
			1.312	33.33	1312		0.250	6.35	0.170	4.32	84
9/16 (.562)	14.3	063	1.250	31.75	1250		0.250	6.35	0.170	4.32	84
			1.312	33.33	1312		0.250	6.35	0.170	4.32	84
			1.375	34.92	1375		0.250	6.35	0.170	4.32	84
			1.438	36.51	1438		0.250	6.35	0.170	4.32	84
			1.500	38.10	1500		0.250	6.35	0.170	4.32	84
			1.562	39.69	1562		0.250	6.35	0.170	4.32	84

* Lead efficiencies are theoretical values based on Kenetek® TFE coated lead screw
 ** Lead efficiencies for Micro Series are theoretical values based on non-coated lead screw
 *** Base-core thread is 50-10%

Standard axes have been translated from their designed inch or mm dimension to an equivalent mm or inch dimension.

Lead Screws by Size • Ø 1/8 to 15/16 in (3.2 to 23 mm)

Diameter and Lead Codes

Diameter Inches	Diameter mm	Diameter Code	Lead Inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) Inches	Outside Diameter (for reference) mm	Root Diameter (for reference) Inches	Root Diameter (for reference) mm	Efficiency %*
3/8 (.375)	10	037	0.025	0.64	0025		0.375	9.53	0.337	8.56	21
			0.039	1.00	0039		0.394	10.01	0.350	8.89	28
			0.04167	1.06	0042		0.375	9.53	0.320	8.13	34
			0.160	1.27	0050	•	0.275	9.53	0.301	7.65	36
			0.055	1.40	0055		0.375	9.53	0.303	7.70	38
			0.059	1.50	0059	•	0.359	9.16	0.313	7.95	38
			0.0625	1.59	0063	•	0.388	9.86	0.295	7.49	41
			0.068	1.73	0068		0.388	9.86	0.295	7.49	42
			0.079	2.00	0079		0.375	9.53	0.294	6.71	47
			0.083	2.12	0083		0.375	9.53	0.293	7.44	48
			0.100	2.54	0100	•	0.375	9.53	0.296	6.76	53
			0.125	3.18	0125	•	0.375	9.53	0.295	7.49	59
			0.157	4.00	0157		0.375	9.53	0.274	6.96	65
			0.1667	4.23	0167		0.371	9.42	0.281	6.63	61
			0.197	5.00	0197		0.375	9.53	0.296	6.76	69
			0.200	5.08	0200	•	0.375	9.53	0.296	6.76	69
			0.250	6.35	0250		0.375	9.53	0.298	6.81	70
			0.300	7.62	0300		0.375	9.53	0.295	6.46	76
0.333	8.46	0333		0.375	9.53	0.245	6.22	78			
0.363	9.22	0363	•	0.375	9.53	0.295	6.73	79			
0.375	9.53	0375		0.375	9.53	0.295	6.73	79			
0.394	10.00	0394		0.375	9.53	0.290	6.60	79			
0.400	10.16	0400		0.375	9.53	0.293	7.44	79			
0.472	12.00	0472		0.368	9.36	0.297	7.29	82			
0.500	12.70	0500		0.368	9.36	0.295	6.73	81			
0.667	16.94	0667	•	0.375	9.53	0.273	6.83	83			
0.667	16.94	0667		0.375	9.53	0.273	6.83	83			
0.884	25.00	0884		0.375	9.53	0.292	6.65	84			
1.000	25.40	1000		0.383	9.73	0.294	6.45	84			
1.200	30.48	1200	•	0.383	9.73	0.294	6.45	84			
1.450	37.75	1450		0.375	9.53	0.278	7.06	84			
1.500	38.10	1500		0.375	9.53	0.294	6.71	83			
0.0625	1.27	0050		0.437	11.10	0.362	9.19	30			
0.0625	1.59	0063	•	0.456	11.67	0.358	9.09	38			
0.079	2.00	0079		0.472	11.99	0.374	9.40	42			
0.111	2.82	0111		0.437	11.10	0.327	8.31	52			
0.118	3.00	0118		0.438	11.13	0.363	9.22	52			
0.125	3.18	0125		0.438	11.13	0.357	9.07	54			
0.197	5.00	0197		0.438	11.13	0.315	8.00	65			
0.236	6.00	0236		0.433	11.00	0.313	7.95	70			
0.250	6.35	0250		0.442	11.23	0.325	8.26	70			
0.307	7.80	0307		0.445	11.30	0.343	8.71	73			
0.325	8.26	0325		0.444	11.28	0.342	8.69	74			
0.394	10.00	0394		0.446	11.33	0.331	8.41	78			
0.472	12.00	0472		0.438	11.13	0.318	8.08	80			
0.500	12.70	0500		0.452	11.48	0.327	8.31	80			
0.615	15.62	0615		0.475	12.07	0.376	9.55	82			

* Listed efficiencies are theoretical values based on Kerk® TFC coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

Lead Screws by Size • Ø 1/8 to 15/16 in (3.2 to 23 mm)

Diameter and Lead Codes

Diameter Inches	Diameter mm	Diameter Code	Lead Inches	Lead mm	LEAD CODE	Left Hand Available	Outside Diameter (for reference) Inches	Outside Diameter (for reference) mm	Root Diameter (for reference) Inches	Root Diameter (for reference) mm	Efficiency %*
1/2 (.500)	13	050	0.050	1.27	0050		0.495	12.57	0.433	11.00	29
			0.079	2.00	0079		0.473	12.01	0.355	9.02	41
			0.098	2.50	0098		0.500	12.70	0.393	9.73	46
			0.100	2.54	0100	•	0.490	12.45	0.384	9.25	46
			0.125	3.18	0125		0.500	12.70	0.374	9.50	51
			0.157	4.00	0157		0.500	12.70	0.384	9.75	58
			0.160	4.06	0160		0.500	12.70	0.388	9.86	67
			0.1667	4.23	0167		0.500	12.70	0.384	9.75	58
			0.197	5.00	0197		0.500	12.70	0.365	9.27	62
			0.200	5.08	0200	•	0.492	12.50	0.386	9.30	63
			0.250	6.35	0250		0.500	12.70	0.392	9.70	67
			0.333	8.46	0333	•	0.497	12.62	0.382	9.19	73
			0.394	10.00	0394		0.497	12.62	0.362	9.19	76
			0.400	10.16	0400		0.497	12.62	0.384	9.25	76
			0.500	12.70	0500		0.488	12.40	0.352	8.94	79
			0.630	16.00	0630		0.500	12.70	0.374	9.50	80
			0.750	19.05	0750		0.525	13.34	0.399	10.13	83
			0.900	22.92	0900		0.500	12.70	0.370	9.40	83
0.984	25.00	0984		0.500	12.70	0.399	9.37	84			
1.000	25.40	1000	•	0.490	12.45	0.372	9.45	84			
1.500	38.10	1500		0.490	12.45	0.374	9.50	85			
2.000	50.80	2000		0.468	12.40	0.378	9.60	87			
0.100	2.54	0100		0.615	15.62	0.488	12.65	40			
0.125	3.18	0125	•	0.625	15.88	0.470	11.94	45			
0.200	5.08	0200		0.625	15.88	0.485	12.57	53			
0.250	6.35	0250		0.625	15.88	0.469	11.91	63			
0.315	8.00	0315		0.627	15.93	0.493	12.92	68			
0.410	10.41	0410	•	0.625	15.88	0.491	12.22	72			
0.500	12.70	0500	•	0.625	15.88	0.478	12.14	76			
0.630	16.00	0630		0.625	15.88	0.491	12.47	78			
1.000	25.40	1000		0.625	15.88	0.481	12.22	83			
1.500	38.10	1500		0.625	15.88	0.499	12.67	85			
1.575	40.00	1575	•	0.625	15.88	0.489	12.67	86			
2.000	50.80	2000	•	0.625	15.88	0.499	12.67	86			

Shaded areas have been translated from their designator inch or mm dimension to an equivalent mm or inch dimension.
 * Listed efficiencies are theoretical values based on Kerk® TFC coated lead screw
 ** Listed efficiencies for Micro screws are theoretical values based on non-coated lead screws
 *** Back-drive threshold is 90-10%

Diameter and Lead Codes

Diameter	Diameter Code	Lead	Lead CODE	Left Hand Available	Outside Diameter (for reference)	Root Diameter (for reference)	Efficiency %*	
inches	mm	inches	mm		inches	mm		
3/4 (750)	075	0.0625	1.59	0063	0.750	19.05	17.04	25
		0.088	2.50	0088	0.742	18.85	15.90	35
		0.100	2.54	0100	0.746	18.85	15.85	35
		0.1667	4.23	0167	0.727	18.47	16.38	47
		0.197	5.00	0197	0.745	18.82	15.85	51
		0.200	5.08	0200	0.741	18.82	16.05	52
		0.250	6.35	0250	0.731	18.57	16.23	57
		0.276	7.00	0276	0.750	19.05	16.24	59
		0.333	8.46	0333	0.750	19.05	15.85	64
		0.384	10.00	0384	0.745	18.92	15.72	67
		0.500	12.70	0500	0.744	18.80	15.85	73
		0.551	14.00	0551	0.750	19.05	15.85	73
		0.591	15.00	0591	0.749	19.02	15.82	74
		0.709	18.00	0709	0.760	19.81	16.51	77
		0.748	19.00	0748	0.772	19.77	15.87	80
0.800	20.32	0800	0.787	19.81	16.48	78		
0.845	21.40	0845	0.794	19.84	16.68	80		
1.000	25.40	1000	0.743	18.87	15.72	81		
1.500	38.10	1500	0.712	18.08	14.99	84		
1.969	50.00	1969	0.751	19.08	15.75	84		
2.000	50.80	2000	0.742	18.85	15.52	84		
2.400	60.96	2400	0.750	19.05	15.75	84		
3.622	92.00	3622	0.750	19.05	16.10	87		
0.200	5.08	0200	0.870	22.10	17.42	46		
0.238	6.00	0238	0.848	21.54	17.73	52		
0.250	6.35	0250	0.875	22.23	19.02	53		
0.384	10.00	0384	0.875	22.23	18.82	65		
0.500	12.70	0500	0.862	21.89	18.80	69		
0.630	16.00	0630	0.875	22.23	18.82	73		
0.667	16.94	0667	0.871	22.12	18.82	74		
0.787	20.00	0787	0.875	22.23	18.82	78		
0.945	24.00	0945	0.875	22.23	18.82	79		
1.000	25.40	1000	0.871	22.12	18.85	80		
0.650	1.27	0650	0.958	23.85	18.74	17		
2.000	50.80	2000	0.927	23.55	18.15	85		
3.000	76.20	3000	0.959	23.85	18.03	86		

* Listed efficiency is theoretical, based on lead and pitch. ** Listed efficiency for Micro screws are theoretical values based on micro-coated flat screws *** Back-drive threshold is 50-10%.

Screw Inertia

Screw Size	[inches=822/inch]	Screw Inertia	[g-cm ² /cm]
5/64 (2)	3.4 x 10 ⁻⁸	9.5 x 10 ⁻⁴	
1/8 (3,2)	1.8 x 10 ⁻⁷	5.0 x 10 ⁻³	
9/64 (3,5)	3.4 x 10 ⁻⁷	9.5 x 10 ⁻³	
5/32 (3,97)	4.9 x 10 ⁻⁷	1.4 x 10 ⁻²	
3/16 (4,76)	1.1 x 10 ⁻⁶	3.1 x 10 ⁻²	
7/32 (5,55)	1.8 x 10 ⁻⁶	5.0 x 10 ⁻²	
1/4 (6)	3 x 10 ⁻⁶	8.3 x 10 ⁻²	
5/16 (8)	5 x 10 ⁻⁶	1.4	
3/8 (10)	1.5 x 10 ⁻⁵	0.4	
7/16 (11)	3.5 x 10 ⁻⁵	1.0	
1/2 (13)	5.2 x 10 ⁻⁵	1.4	
5/8 (16)	14.2 x 10 ⁻⁵	3.9	
3/4 (19)	30.5 x 10 ⁻⁵	8.5	
7/8 (22)	58.0 x 10 ⁻⁵	16.1	
15/16 (24)	73.0 x 10 ⁻⁵	20.3	

Standard End Machining mm[inches]

